



INDEX

OBSOLETE DATA

Tyre dimensions from STRO Data Book wich has been removed due to age or lack of space.

**P Passenger Car Tyres**

Index	1
Tables	2-25

**L Commercial Vehicle Tyres**

Index	1
Tables	2-8

S

# SCANDINAVIAN TIRE & RIM ORGANIZATION



N O R M - N O R M I

P 123.01

Personbilsdäck  
 Henkilöautonrenkaat  
 Passenger Car Tyres

Radial  
 Vyörakenne  
 Radial

Profil .88-.85-.90  
 Poikkileikkaussuhde .88-.85-.90  
 Aspect Ratio .88-.85-.90

	L I							kPa	
			Norm	Max	Norm	Max			
120R10	51	3 1/2	118	123	460	468	195	210	1403
130R12	60	3 1/2	128	133	522	531	250	210	1592
140R12 = 5.00	65	4	138	144	538	547	290	210	1641
150R12 = 5.50	72	4	146	152	554	564	355	220	1690
150R13 = 5.50	74	4	145	154	580	590	375	220	1769
160R13 = 6.00	78	4 1/2	158	164	596	607	425	230	1818
170R13	82	5	168	178	608	619	475	240	1854
150R14 = 5.50	76	4	145	151	606	616	400	220	1848
180R15	89	5	174	181	676	688	580	240	2062
6.50R13	86	4 1/2	169	176	624	636	530	230	1903
7.00R13	88	5	178	185	644	657	560	240	1964
7.25R13	90	5	184	191	654	667	600	230	1995
7.00R14	90	5	178	185	668	681	600	230	2037
7.50R14	94	5 1/2	190	198	688	701	670	230	2098
125/85R13	69	3.50	126	131	542	550	325	310	1653
135/85R13	74	3.50	133	138	560	569	375	310	1708
145/85R13	78	4.00	145	151	576	586	426	310	1757
155/85R13	82	4.50	157	163	594	605	475	310	1812
155/85R14	84	4 1/2	157	163	620	631	500	310	1891
155/85R15	83	4 1/2	157	163	645		487	310	1967
<b>85-90 series</b>	<b>85-90-sarja</b>	<b>Twin Application</b>		<b>Kaksonen</b>					
125/90R16	70	3J	121	126	632	642	335	250	1927
Reinf.	74						375	290	
125/90R17	71	3J	121	126	658	668	345	250	
Reinf.	75						387	290	
105/85R16	57	3J	106	110	586		230	250	1781
XL	61						257	290	
125/85R16	68	3J	121	126	618	626	315	250	
Reinf.	72						355	290	

# SCANDINAVIAN TIRE & RIM ORGANIZATION

N O R M - N O R M I


P 151.00



Personbilsdäck  
Henkilöautonrenkaat  
Passenger Car Tyres

.45-.40-series CT Tyres

◎	PR	L I							kPa	
				Norm	Max	Norm	Max			
CT 165/45R400		75	105	165	172	548	554	387	290	1671
CT 205/45R425		89	135	205	213	609	617	580	290	1858
CT 205/45R450		91	135	205	213	634	642	615	290	1934
CT 225/40R475	Reinf.	94	150	225	234	655	662	670	290	1998
CT 230/40R475		102	150	230	239	659	667	850	350	2010
CT 235/40R475		95	165	235	244	663	671	690	290	2022
CT 225/40R500	Reinf.	95	150	225	234	685	692	690	290	2089
CT 245/40R500		100	165	245	255	696	704	800	290	2123
CT 265/40R500		111	180	265	276	712	720	1090	350	2172

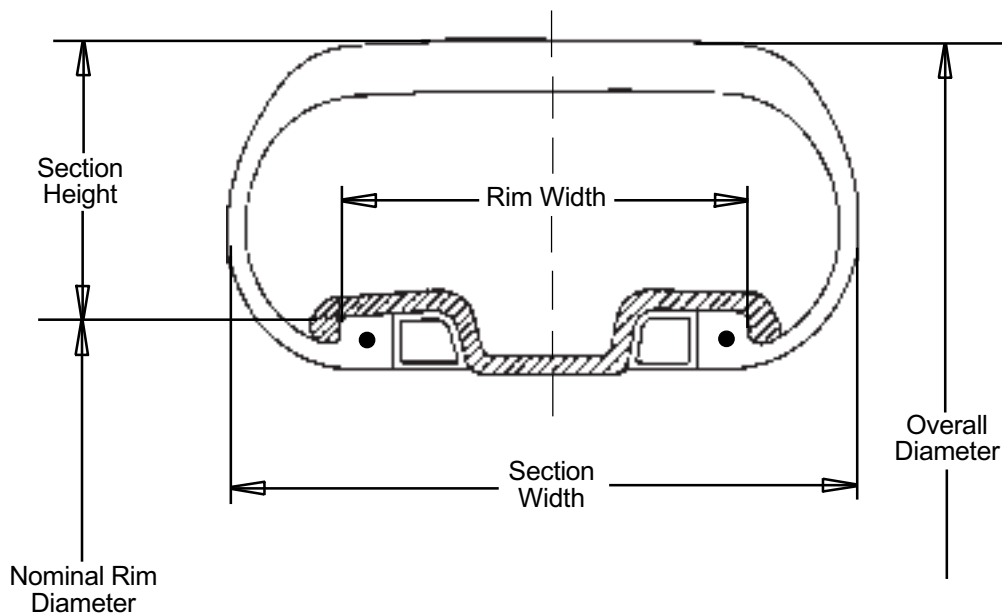

# SCANDINAVIAN TIRE & RIM ORGANIZATION



**N O R M - N O R M I**

**P 101.01**



Personbilsdäck  
Henkilöautonrenkaat  
Passenger Car Tyres

Diagonal  
Diagonal  
Diagonal

Profil .95  
Poikkileikkaussuhde .95  
Aspect Ratio .95

◎	PR	L I	◎	◎		◎		↓	kPa	◎
				Norm	Max	Norm	Max			
5.20-10	4	64	3 1/2	132	140	508	526	280	210	1514
	6	67								
	8	69								
5.20-12	4	68	3 1/2	132	140	558	576	315	210	1663
	6	71								
	8	72								
5.60-12	4	73	4.0	145	154	572	591	365	210	1761
	6	76								
	8	77								
5.20-13	4	70	3 1/2J	132	140	582	600	335	210	1734
	6	73								
	8	75								
5.60-13	4	75	4 J	145	154	600	619	387	210	1788
	6	78								
	8	80								
5.90-13	4	78	4 J	150	159	616	636	425	210	1836
	6	81								
	8	83								
6.40-13	4	82	4 1/2J	163	173	642	664	475	210	1913
	6	85								
	8	87								
6.70-13	4	85	4 1/2K	170	180	658	681	515	210	1961
	6	89								
	8	90								
5.20-14	4	74	3 1/2J	132	140	612	630	375	210	1824
	6	77								
	8	78								
5.60-14	4	77	4 J	145	154	626	645	412	210	1865
	6	80								
	8	81								
5.90-14	4	80	4 J	150	159	642	662	450	210	1913
	6	82								
	8	84								
6.40-14	4	84	4 1/2J	163	173	666	688	500	210	1985
	6	87								
	8	89								
5.20-15	4	76	3 1/2J	132	140	634	652	400	210	1889
	6	79								
	8	80								
5.60-15	4	78	4 J	145	154	650	669	425	210	1937
	6	81								
	8	83								
5.90-15	4	81	4 J	150	159	668	688	462	210	1937
	6	84								
	8	86								
6.40-15	4	86	4 1/2J	163	173	692	714	530	210	2062
	6	89								
	8	90								
6.70-15	4	88	4 1/2K	170	180	710	733	560	210	2116
	6	91								
	8	93								

# SCANDINAVIAN TIRE & RIM ORGANIZATION

N O R M - N O R M I

P 101.02



(S) Personbilsdäck  
(FIN) Henkilöautonrenkaat  
(GB) Passenger Car Tyres

Diagonal  
Diagonal  
Diagonal

Profil .95  
Poikkileikkaussuhde .95  
Aspect Ratio .95

	PR	L I							kPa	
				Norm	Max	Norm	Max			
7.10-15	4	90	5 K	180	191	724	748	600	210	2158
	6	94						670	250	
	8	95						690	280	
7.60-15	4	93	5 1/2K	193	205	742	767	650	210	2211
	6	96						710	250	
	8	99						775	280	
8.00-15	4	96	6 L	208	220	752	778	710	210	2241
	6	99						775	250	
	8	101						825	280	
8.20-15	4	99	6 L	213	226	760	787	775	210	2265
	6	102						850	250	
	8	104						900	280	
8.90-15	8	110	6 1/2	233	250	796	827	1060	280	2372



INDEX

**P - PASSENGER CAR TYRES**

Page

	<b>Radial Tyres</b>		
P 123.01	88-, 85-, 90-Series+Twin Appl.	Millimetric and Code Designated Sizes	2
P 151.00	45-, 40- " CT tyres		3
	<b>Diagonal Tyres</b>		
P 101.01-02	95- series	Code Designated Sizes	4-5
P 103.01	88- "	"	6
P 105.01-02	82- "	Millimetric Sizes	7-8
P 107.01	77- "	Code Designated Sizes	9
P 311.01	Load Capacities for American Tyres in Europe	Alpha-numeric	10
	<b>USA Radial Tyres</b>		
P 314.01	78- series	Alpha-numeric	11
P 316.01	70- "	"	12
P 318.01	60- "	"	13
P 319.01	55- "	"	14
	<b>USA Diagonal Tyres</b>		
P 319.01	50- series	Alpha-numeric	14
P 313.01	78-, 84- "	"	15
P 315.01	70- "	"	16
P 317.01	60- "	"	17
P 312.01	83- "	"	18
	<b>Rims</b>		
P 951.01	Recommended and Permitted Rims - Europe		19
P 951.02	"		20
P 951.03	"		21
P 951.04	"		22
P 950.09 A-B	Alternative Rims		23-24
P 951.01A	Recommended and Permitted Rims - USA		25

P

# SCANDINAVIAN TIRE & RIM ORGANIZATION









N O R M - N O R M I

P 123.01

(S) Personbilsdäck  
(FIN) Henkilöautonrenkaat  
(GB) Passenger Car Tyres

Radial  
Vyörakehne  
Radial

Profil .88-.85-.90  
Poikkileikkaussuhde .88-.85-.90  
Aspect Ratio .88-.85-.90

	L I							kPa	
			Norm	Max	Norm	Max			
120R10	51	3 1/2	118	123	460	468	195	210	1403
130R12	60	3 1/2	128	133	522	531	250	210	1592
140R12 = 5.00	65	4	138	144	538	547	290	210	1641
150R12 = 5.50	72	4	146	152	554	564	355	220	1690
150R13 = 5.50	74	4	145	154	580	590	375	220	1769
160R13 = 6.00	78	4 1/2	158	164	596	607	425	230	1818
170R13	82	5	168	178	608	619	475	240	1854
150R14 = 5.50	76	4	145	151	606	616	400	220	1848
180R15	89	5	174	181	676	688	580	240	2062
6.50R13	86	4 1/2	169	176	624	636	530	230	1903
7.00R13	88	5	178	185	644	657	560	240	1964
7.25R13	90	5	184	191	654	667	600	230	1995
7.00R14	90	5	178	185	668	681	600	230	2037
7.50R14	94	5 1/2	190	198	688	701	670	230	2098
125/85R13	69	3.50	126	131	542	550	325	310	1653
135/85R13	74	3.50	133	138	560	569	375	310	1708
145/85R13	78	4.00	145	151	576	586	426	310	1757
155/85R13	82	4.50	157	163	594	605	475	310	1812
155/85R14	84	4 1/2	157	163	620	631	500	310	1891
155/85R15	83	4 1/2	157	163	645		487	310	1967
<b>85-90 series</b>	<b>85-90-sarja</b>	<b>Twin Application</b>		<b>Kaksonen</b>					
125/90R16	70	3J	121	126	632	642	335	250	1927
Reinf.	74						375	290	
125/90R17	71	3J	121	126	658	668	345	250	
Reinf.	75						387	290	
105/85R16	57	3J	106	110	586		230	250	1781
XL	61						257	290	
125/85R16	68	3J	121	126	618	626	315	250	
Reinf.	72						355	290	

# SCANDINAVIAN TIRE & RIM ORGANIZATION

N O R M - N O R M I


P 151.00



Personbilsdäck  
Henkilöautonrenkaat  
Passenger Car Tyres

.45-.40-series CT Tyres

◎	PR	L I							kPa	
				Norm	Max	Norm	Max			
CT 165/45R400		75	105	165	172	548	554	387	290	1671
CT 205/45R425		89	135	205	213	609	617	580	290	1858
CT 205/45R450		91	135	205	213	634	642	615	290	1934
CT 225/40R475	Reinf.	94	150	225	234	655	662	670	290	1998
CT 230/40R475		102	150	230	239	659	667	850	350	2010
CT 235/40R475		95	165	235	244	663	671	690	290	2022
CT 225/40R500	Reinf.	95	150	225	234	685	692	690	290	2089
CT 245/40R500		100	165	245	255	696	704	800	290	2123
CT 265/40R500		111	180	265	276	712	720	1090	350	2172

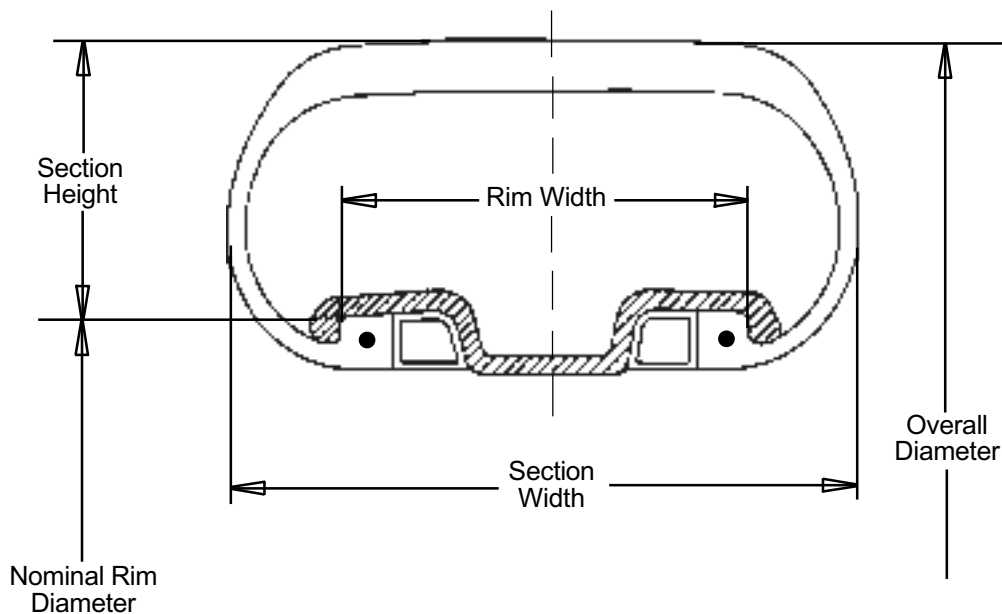



# SCANDINAVIAN TIRE & RIM ORGANIZATION



N O R M - N O R M I

P 101.01



Personbilsdäck  
Henkilöautonrenkaat  
Passenger Car Tyres

Diagonal  
Diagonal  
Diagonal

Profil .95  
Poikkileikkaussuhde .95  
Aspect Ratio .95

◎	PR	L I	◎	◎		◎		↓	kPa	◎
				Norm	Max	Norm	Max			
5.20-10	4	64	3 1/2	132	140	508	526	280	210	1514
	6	67								
	8	69								
5.20-12	4	68	3 1/2	132	140	558	576	315	210	1663
	6	71								
	8	72								
5.60-12	4	73	4.0	145	154	572	591	365	210	1761
	6	76								
	8	77								
5.20-13	4	70	3 1/2J	132	140	582	600	335	210	1734
	6	73								
	8	75								
5.60-13	4	75	4 J	145	154	600	619	387	210	1788
	6	78								
	8	80								
5.90-13	4	78	4 J	150	159	616	636	425	210	1836
	6	81								
	8	83								
6.40-13	4	82	4 1/2J	163	173	642	664	475	210	1913
	6	85								
	8	87								
6.70-13	4	85	4 1/2K	170	180	658	681	515	210	1961
	6	89								
	8	90								
5.20-14	4	74	3 1/2J	132	140	612	630	375	210	1824
	6	77								
	8	78								
5.60-14	4	77	4 J	145	154	626	645	412	210	1865
	6	80								
	8	81								
5.90-14	4	80	4 J	150	159	642	662	450	210	1913
	6	82								
	8	84								
6.40-14	4	84	4 1/2J	163	173	666	688	500	210	1985
	6	87								
	8	89								
5.20-15	4	76	3 1/2J	132	140	634	652	400	210	1889
	6	79								
	8	80								
5.60-15	4	78	4 J	145	154	650	669	425	210	1937
	6	81								
	8	83								
5.90-15	4	81	4 J	150	159	668	688	462	210	1937
	6	84								
	8	86								
6.40-15	4	86	4 1/2J	163	173	692	714	530	210	2062
	6	89								
	8	90								
6.70-15	4	88	4 1/2K	170	180	710	733	560	210	2116
	6	91								
	8	93								

# SCANDINAVIAN TIRE & RIM ORGANIZATION

N O R M - N O R M I

P 101.02



(S) Personbilsdäck  
(FIN) Henkilöautonrenkaat  
(GB) Passenger Car Tyres

Diagonal  
Diagonal  
Diagonal

Profil .95  
Poikkileikkaussuhde .95  
Aspect Ratio .95

	PR	L I							kPa	
				Norm	Max	Norm	Max			
7.10-15	4	90	5 K	180	191	724	748	600	210	2158
	6	94						670	250	
	8	95						690	280	
7.60-15	4	93	5 1/2K	193	205	742	767	650	210	2211
	6	96						710	250	
	8	99						775	280	
8.00-15	4	96	6 L	208	220	752	778	710	210	2241
	6	99						775	250	
	8	101						825	280	
8.20-15	4	99	6 L	213	226	760	787	775	210	2265
	6	102						850	250	
	8	104						900	280	
8.90-15	8	110	6 1/2	233	250	796	827	1060	280	2372

# SCANDINAVIAN TIRE & RIM ORGANIZATION



**N O R M - N O R M I**

**P 103.01**



S Personbilsdäck  
 FIN Henkilöautonrenkaat  
 GB Passenger Car Tyres

Diagonal  
 Diagonal  
 Diagonal

Profil .88  
 Poikkileikkaussuhde .88  
 Aspect Ratio .88

◎	PR	L I	◎	◎		◎		↓	kPa	◎
				Norm	Max	Norm	Max			
5.00-12	4	64	3 1/2	128	136	532	548	280	210	1585
	6	66						300	250	
	8	68						315	280	
5.50-12	4	68	4 J	142	151	552	569	315	210	1645
	6	71						345	250	
	8	73						365	280	
6.00-12	4	74	4 1/2J	156	165	574	593	375	210	1711
	6	77						412	250	
	8	78						425	280	
5.00-13	4	66	3 1/2	128	136	558	576	300	210	1663
5.50-13	4	70	4 J	142	151	578	595	335	210	1722
	6	73						365	250	
	8	75						387	210	
6.00-13	4	76	4 1/2J	156	165	600	619	400	210	1788
	6	79						437	250	
	8	81						462	280	
6.50-13	4	81	4 1/2J	166	176	624	645	462	210	1860
	6	85						515	250	
	8	87						545	280	
7.00-13	4	85	5 J	178	189	644	666	515	210	1919
	6	88						560	250	
	8	90						600	280	
7.25-13	4	87	5 J	184	195	654	677	545	210	1949
	6	90						600	250	
	8	92						630	280	
7.50-13	4	89	5 1/2J	190	201	666	690	580	210	1985
	6	92						630	250	
	8	94						670	280	
6.00-14	4	78	4 1/2J	156	165	626	645	425	210	1865
	6	80						450	250	
	8	82						475	280	
6.50-14	4	83	4 1/2J	166	176	650	671	487	210	1937
	6	86						530	250	
	8	88						560	280	
7.00-14	4	87	5 J	178	189	668	690	545	210	1991
	6	90						600	250	
	8	91						615	280	
7.50-14	4	90	5 1/2K	190	201	688	712	600	210	2050
	6	94						670	250	
	8	95						690	280	
8.00-14	4	94	6 K	203	215	702	726	670	210	2092
	6	96						710	250	
	8	98						750	280	
8.50-14	4	96	6 K	208	220	714	739	710	210	2128
	6	99						775	250	
	8	100						800	280	
5.50-15L	4	75	4 J	142	151	630	669	387	210	1877
	6	78						425	250	
	8	80						450	280	
6.00-15L	4	80	4 1/2J	156	165	650	669	450	210	1937
	6	82						475	250	
	8	84						500	280	
6.50-15L	4	84	4 1/2J	166	176	676	716	500	210	2014
	6	87						545	250	
	8	88						560	280	
7.00-15L	4	88	5 J	178	189	694	716	560	210	2068
	6	91						615	250	
	8	93						650	280	

# SCANDINAVIAN TIRE & RIM ORGANIZATION

N O R M - N O R M I

P 105.01



(S) Personbilsdäck  
(FIN) Henkilöautonrenkaat  
(GB) Passenger Car Tyres

Diagonal  
Diagonal  
Diagonal

Profil .82  
Poikkileikkaussuhde .82  
Aspect Ratio .82

◎	PR	L I	◎	◎		◎		↓	kPa	◎
				Norm	Max	Norm	Max			
145-10	4	65	4	147	156	496		290	210	1478
125-12	4	60	3 1/2J	127	135	514	529	250	210	1532
	6	64						280	250	
	8	65						290	280	
135-12	4	64	4 J	137	145	526	542	280	210	1567
	6	68						315	250	
	8	69						325	280	
145-12	4	70	4 J	147	156	546		335	210	1627
155-12	4	73	4 1/2J	157	166	554		365	210	1651
	6	77						412	250	
135-13	4	68	4 J	137	145	552		315	210	1645
145-13	4	72	4 J	147	156	570	587	355	210	1699
	6	75						387	250	
	8	77						412	280	
155-13	4	75	4 1/2J	157	166	582	600	387	210	1734
	6	78						425	250	
	8	81						462	280	
165-13	4	78	4 1/2J	167	177	600	619	425	210	1788
	6	82						475	250	
	8	84						500	280	
175-13	4	82	5 J	178	189	610	630	475	210	1818
	6	86						530	250	
	8	88						560	280	
185-13	4	86	5 1/2J	188	199	628	649	530	210	1871
	6	89						580	250	
	8	91						615	280	
135-14	4	70	4 J	137	145	578		335	210	1722
145-14	4	74	4 J	147	156	594		375	210	1770
155-14	4	77	4 1/2J	157	166	608	626	412	210	1812
	6	80						450	250	
	8	82						475	280	
165-14	4	81	4 1/2J	167	177	626	645	462	210	1865
	6	84						500	250	
	8	86						530	280	
175-14	4	85	5 JK	178	189	638	658	515	210	1901
	6	88						560	250	
	8	90						600	280	
185-14	4	88	5 1/2JK	188	199	654	675	560	210	1949
	6	91						615	250	
	8	93						650	280	
195-14	4	91	5 1/2JK	198	210	670	692	615	210	1997
	6	94						670	250	
	8	97						730	280	
205-14	4	94	6 JK	208	220	690	713	670	210	2056
	6	97						730	250	
	8	99						775	280	
215-14	4	97	6 JK	218	231	704	728	730	210	2098
	6	100						800	250	
	8	101						825	280	
225-14	4	99	6 1/2JK	228	242	718	743	775	210	2140
	6	102						850	250	
	8	104						900	280	

# SCANDINAVIAN TIRE & RIM ORGANIZATION



**N O R M - N O R M I**

**P 105.02**



S Personbilsdäck  
 FIN Henkilöautonrenkaat  
 GB Passenger Car Tyres

Diagonal  
 Diagonal  
 Diagonal

Profil .82  
 Poikkileikkaussuhde .82  
 Aspect Ratio .82

	PR	L I							kPa	
				Norm	Max	Norm	Max			
125-15	4	66	3 1/2J	127	135	592		300	210	1764
135-15	4	71	4 J	137	145	604	620	345	210	1800
	6	74						375	250	
	8	76						400	280	
145-15	4	76	4 J	147	156	620	637	400	210	1848
	6	79						437	250	
	8	81						462	280	
155-15	4	79	4 1/2J	157	166	634	652	437	210	1889
	6	82						475	250	
	8	84						500	280	
165-15	4	83	4 1/2J	167	177	650	669	487	210	1937
	6	86						530	250	
	8	88						560	280	
175-15	4	86	5 JK	178	189	664	684	530	210	1979
	6	90						600	250	
	8	92						630	280	
185-15	4	89	5 1/2JK	188	199	678	699	580	210	2020
	6	93						650	250	
	8	94						670	280	
195-15	4	92	5 1/2JK	198	210	694	716	630	210	2068
	6	95						690	250	
	8	98						750	280	
205-15	4	95	6 JK	208	220	714	737	690	210	2128
	6	98						750	250	
	8	100						800	280	
215-15	4	98	6 JK	218	231	728	752	750	210	2169
	6	101						825	250	
	8	103						875	280	
225-15	4	100	6 1/2JK	228	242	742		800	210	2211
	6	104						900	250	
235-15	4	103	6 1/2JK	238		756		875	210	2253
	6	106						950	250	
175/82-16 (6.95-16)	4	85 P						515		

# SCANDINAVIAN TIRE & RIM ORGANIZATION

N O R M - N O R M I

P 107.01



(S) Personbilsdäck  
(FIN) Henkilöautonrenkaat  
(GB) Passenger Car Tyres

Diagonal  
Diagonal  
Diagonal

Profil .77  
Poikkileikkaussuhde .77  
Aspect Ratio .77

◎	PR	L I	◎	◎		◎		↓	kPa	◎
				Norm	Max	Norm	Max			
5.9 -10	4	65	4 J	148	157	483	499	290	210	1439
	6	68						315	250	
	8	70						335	280	
5.3 -12	4	60	4 J	135	143	506	520	250	210	1508
	6	64						280	250	
	8	65						290	280	
5.9 -12	4	70	4 J	148	157	533	549	335	210	1588
	6	73						365	250	
	8	75						387	280	
6.2 -12	4	73	4 1/2J	159	168	547	564	365	210	1630
	6	76						400	250	
	8	78						425	280	
5.9 -13	4	72	4 J	148	157	560	576	355	210	1669
	6	75						387	250	
	8	77						412	280	
6.2 -13	4	75	4 1/2J	159	168	573	590	387	210	1708
	6	78						425	250	
	8	81						462	280	
6.5 -13	4	78	4 1/2J	166	176	586	604	425	210	1746
	6	82						475	250	
	8	84						500	280	
6.9 -13	4	82	5 J	177	187	600	619	475	210	1788
	6	86						530	250	
	8	88						560	280	
7.3 -13	4	86	5 J	184	195	614	634	530	210	1830
	6	89						580	250	
	8	91						615	280	
7.7 -13	4	89	5 1/2J	195	206	628	649	580	210	1871
	6	93						650	250	
	8	94						670	280	
6.2 -14	4	77	4 1/2J	159	168	598	615	412	210	1782
	6	80						450	250	
	8	82						475	280	
6.9 -14	4	85	5 J	177	187	625	644	515	210	1863
	6	88						560	250	
	8	90						600	280	
7.3 -14	4	88	5 J	184	195	639	659	560	210	1904
	6	91						615	250	
	8	93						650	280	
6.2 -15	4	79	4 1/2J	159	168	623	640	437	210	1857
	6	82						475	250	
	8	84						500	280	
6.9 -15	4	86	5 J	177	187	651	670	530	210	1940
	6	90						600	250	
	8	92						630	280	
7.3 -15	4	89	5 J	184	195	664	684	580	210	1979
	6	93						650	250	
	8	94						670	280	

# SCANDINAVIAN TIRE & RIM ORGANIZATION



N O R M - N O R M I

P 311.01

<p>(S) (FIN) (GB)</p>	<p>Belastningar för amerikanska däck i Europa Amerikkalaisten renkaiden kantavuus Euroopassa Load Capacities for American Tyres in Europe</p>	<p>Alfanumeriska Alfanumeeriset Alpha-numeric</p>
-------------------------------	---	---

Dimension Koko Tyre Size	LR	Max belastn/tryck Suurin kant/Paine Max load capacity/pressure		
A, AR	B	445	225	<p>(S) För samtliga typer av USA-däck som är försedda med både ECE eller EEC Speed- och Loadindex gäller indexens värden.</p> <p>(FIN) Kaikille USA-renkaille kantavuuksille jotka ovat varustetut sekä ECE:n tai EEC:n nopeus, että LI-tunnuksella, on voimassa ko. tunnukset.</p> <p>(GB) All types of USA tyres which are marked with both ECE or EEC Speed and Load Index, the Index values is valid.</p>
	C	480	255	
	D	515	280	
B, BR	B	485	225	
	C	525	255	
	D	560	280	
C, CR	B	520	225	
	C	560	255	
	D	600	280	
D, DR	B	555	225	
	C	600	255	
	D	640	280	
E, ER	B	590	225	
	C	635	255	
	D	675	280	
F, FR	B	635	225	
	C	680	255	
	D	730	280	
G, GR	B	680	225	
	C	735	255	
	D	785	280	
H, HR	B	750	225	
	C	805	255	
	D	860	280	
J, JR	B	780	225	
	C	845	255	
	D	900	280	
K, KR	B	805	225	
	C	865	255	
	D	920	280	
L, LR	B	830	225	
	C	895	255	
	D	955	280	
M, MR	B	880	225	
	C	950	255	
	D	1015	280	
N, NR	B	930	225	
	C	1005	255	
	D	1070	280	

# SCANDINAVIAN TIRE & RIM ORGANIZATION

NORM - NORMI

P 314.01



<b>(S)</b> Personbilsdäck	USA	Radial	Profil .78	Alfanum. dim.
<b>(FIN)</b> Henkilöautonrenkaat	USA	Vyörakenne	Poikkileikkaussuhde .78	Alfanumeeriset koot
<b>(GB)</b> Passenger Car Tyres	USA	Radial	Aspect Ratio .78	Alpha-numeric

	L R							kPa	
			Norm	Max	Norm	Max			
AR78-13	B	4 1/2	165	182	593	614	445	225	1809
BR78-13	B	4 1/2	171	189	606	629	485	225	1848
CR78-13	B	5	181	200	617	641	520	225	1881
DR78-13	B	5	186	206	628	653	555	225	1915
ER78-13	B	5 1/2	196	217	639	664	590	225	1949
AR78-14	B	4 1/2	162	179	609	630	445	225	1858
BR78-14	B	4 1/2	167	185	623	645	485	225	1900
CR78-14	B	5	177	196	635	658	520	225	1937
DR78-14	B	5	182	202	645	669	555	225	1967
ER78-14	B	5	187	207	655	680	590	225	1998
FR78-14	B	5 1/2	199	220	668	693	635	225	2037
GR78-14	B	6	210	232	682	709	680	225	2080
HR78-14	B	6	218	241	700	728	750	225	2135
AR78-15	B	4 1/2	158	175	627	648	445	225	1912
BR78-15	B	4 1/2	163	181	641	662	485	225	1955
CR78-15	B	5	173	192	652	675	520	225	1989
DR78-15	B	5	179	198	662	686	555	225	2019
ER78-15	B	5 1/2	189	209	672	696	590	225	2050
FR78-15	B	5 1/2	195	216	684	709	635	225	2086
GR78-15	B	6	207	228	699	725	680	225	2132
HR78-15	B	6	214	237	715	743	750	225	2181
JR78-15	B	6 1/2	223	246	725	754	780	225	2211
LR78-15	B	6 1/2	228	252	738	768	830	225	2250
MR78-15	B	6 1/2	233	257	751	781	880	225	2291
NR78-15	B	7	246	271	759	791	930	225	2315
<p><b>(S)</b> Belastningar LR C + D - se STRO P 311.01</p> <p><b>(FIN)</b> Kantavuus LR C + D - katso STRO P 311.01</p> <p><b>(GB)</b> Load capacities LR C + D - see STRO P 311.01</p>									









# SCANDINAVIAN TIRE & RIM ORGANIZATION

N O R M - N O R M I

P 316.01



(S) Personbilsdäck USA Radial Profil .70 Alfanum. dim.  
(FIN) Henkilöautonrenkaat USA Vyörakenne Poikkileikkaussuhde .70 Alfanumeeriset koot  
(GB) Passenger Car Tyres USA Radial Aspect Ratio .70 Alpha-numeric

	L R							kPa	
			Norm	Max	Norm	Max			
AR70-13	B	5	181	200	589	611	445	225	1797
BR70-13	B	5 1/2	193	213	604	626	485	225	1842
CR70-13	B	5 1/2	199	220	613	637	520	225	1870
DR70-13	B	5 1/2	204	225	624	649	555	225	1903
CR70-14	B	5 1/2	194	214	632	655	520	225	1928
DR70-14	B	5 1/2	200	221	641	664	555	225	1955
ER70-14	B	5 1/2	205	227	652	676	590	225	1989
FR70-14	B	6	217	239	664	690	635	225	2025
GR70-14	B	6	224	248	677	703	680	225	2065
HR70-14	B	6 1/2	238	263	694	722	750	225	2117
JR70-14	B	6 1/2	242	267	704	733	780	225	2147
LR70-14	B	6 1/2	248	274	717	747	830	225	2187
BR70-15	B	5	180	199	638	660	485	225	1946
CR70-15	B	5 1/2	190	210	649	672	520	225	1980
DR70-15	B	5 1/2	196	217	658	682	555	225	2007
ER70-15	B	5 1/2	201	223	668	692	590	225	2037
FR70-15	B	6	213	235	681	706	635	225	2077
GR70-15	B	6	219	242	695	722	630	225	2120
HR70-15	B	6 1/2	233	267	712	739	750	225	2172
JR70-15	B	6 1/2	238	263	719	747	780	225	2193
KR70-15	B	6 1/2	241	266	724	753	805	225	2208
LR70-15	B	6 1/2	245	270	732	761	830	225	2233
MR70-15	B	7	257	284	742	772	880	225	2263
<p> <span>(S)</span> Belastningar LR C + D - se STRO P 311.01  <span>(FIN)</span> Kantavuus LR C + D - katso STRO P 311.01  <span>(GB)</span> Load capacities LR C + D - see STRO P 311.01                     </p>									

# SCANDINAVIAN TIRE & RIM ORGANIZATION



**N O R M - N O R M I**

**P 318.01**

<b>(S)</b> Personbilsdäck	USA Radial	Profil .60	Alfanum. dim.
<b>(FIN)</b> Henkilöautonrenkaat	USA Vyörakenne	Poikkileikkaussuhde .60	Alfanumeeriset koot
<b>(GB)</b> Passenger Car Tyres	USA Radial	Aspect Ratio .60	Alpha-numeric

	L R							kPa	
			Norm	Max	Norm	Max			
AR60-13	B	5 1/2	199	220	570	591	445	225	1739
BR60-13	B	6	212	234	583	604	485	225	1778
ER60-13	B	6 1/2	234	259	613	637	590	225	1870
AR60-14	B	5 1/2	195	216	588	607	445	225	1793
ER60-14	B	6 1/2	231	254	629	653	590	225	1919
FR60-14	B	6 1/2	237	262	642	666	635	225	1958
GR60-14	B	7	250	276	655	680	680	225	1998
HR60-14	B	7	260	286	670	696	750	225	2044
JR60-14	B	7	265	293	678	704	780	225	2068
LR60-14	B	8	281	311	691	719	830	225	2108
ER60-15	B	6	220	243	648	670	590	225	1976
FR60-15	B	6 1/2	233	257	658	682	635	225	2007
HR60-15	B	7	255	281	687	713	750	225	2095
JR60-15	B	7	260	287	695	722	780	225	2118
LR60-15	B	7	266	294	707	734	830	225	2156
<p><b>(S)</b> Belastningar LR C + D - se STRO P 311.01</p> <p><b>(FIN)</b> Kantavuus LR C + D - katso STRO P 311.01</p> <p><b>(GB)</b> Load capacities LR C + D - see STRO P 311.01</p>									







# SCANDINAVIAN TIRE & RIM ORGANIZATION

N O R M - N O R M I

P 319.01



(S) Personbilsdäck USA Diagonal Radial Profil .50 Alfnum. dim.  
(FIN) Henkilöautonrenkaat USA Ristikudos Vyörakenne Poikkileikkaussuhde Alfanumeeriset koot  
(GB) Passenger Car Tyres USA Diagonal Radial Aspect Ratio .50 Alpha-numeric

	LR							kPa	
			Norm	Max	Norm	Max			
<b>Diagonal - Ristikudos</b>									
B50-13	B	6 1/2	232	256	560	579	485	225	1669
C50-13	B	6 1/2	238	263	570	590	520	225	1697
D50-13	B	7	250	276	580	600	555	225	1728
F50-14	B	7	259	285	617	639	635	225	1904
G50-14	B	8	278	306	628	651	680	225	1871
H50-14	B	8	288	318	644	667	750	225	1919
M50-14	B	9	318	350	672	698	880	225	2003
N50-14	B	9	326	360	681	708	930	225	2029
B50-15	B	6	217	239	598	616	485	225	1782
E50-15	B	6 1/2	241	265	625	645	590	225	1863
G50-15	B	7	262	290	646	668	680	225	1925
H50-15	B	8	283	312	661	685	750	225	1970
L50-15	B	8	295	326	679	704	830	225	2098
N50-15	B	9	321	354	698	724	930	225	2080
<b>Radial - Vyörakenne</b>									
BR50-13	B	6 1/2	232	256	560	579	485	225	1708
CR50-13	B	6 1/2	238	263	570	590	520	225	1739
GR50-14	B	8	278	306	628	651	680	225	1915
JR50-14	B	8	294	324	650	674	780	225	1983
GR50-15	B	7	262	290	646	668	680	225	1970
HR50-15	B	8	283	312	661	685	750	225	2016
JR50-15	B	8	288	318	669	693	780	225	2040
LR50-15	B	8	295	326	679	704	830	225	2071
<p> <span>(S)</span> Belastningar LR C + D - se STRO P 311.01  <span>(FIN)</span> Kantavuus LR C + D - katso STRO P 311.01  <span>(GB)</span> Load capacities LR C + D - see STRO P 311.01                 </p>									







# SCANDINAVIAN TIRE & RIM ORGANIZATION

N O R M - N O R M I

P 313.01



**(S)** Personbilsdäck USA Diagonal Profil .78-.84 Alfanum. dim.  
**(FIN)** Henkilöautonrenkaat USA Diagonal Poikkileikkaussuhde .78-.84 Alfanumeeriset koot  
**(GB)** Passenger Car Tyres USA Diagonal Aspect Ratio .78-.84 Alpha-numeric

	LR							kPa	
			Norm	Max	Norm	Max			
A78-13	B	4 1/2	167	185	595	618	445	225	1773
B78-13	B	5	179	197	609	632	485	225	1815
C78-13	B	5	184	203	621	645	520	225	1851
D78-13	B	5 1/2	195	216	630	655	555	225	1877
A78-14	B	4 1/2	163	181	613	635	445	225	1827
B78-14	B	4 1/2	168	186	627	650	485	225	1868
C78-14	B	5	179	198	641	664	520	225	1910
D78-14	B	5	186	206	647	671	555	225	1928
E78-14	B	5 1/2	194	214	660	685	590	225	1967
F78-14	B	5 1/2	200	221	673	699	635	225	2006
G78-14	B	6	212	234	687	714	680	225	2047
H78-14	B	6	220	243	705	733	750	225	2101
J78-14	B	6	223	246	716	746	780	225	2134
A78-15	B	4 1/2	161	178	629	650	445	225	1874
B78-15	B	4 1/2	166	184	644	666	485	225	1919
C78-15	B	5	176	195	655	678	520	225	1952
D78-15	B	5	181	200	666	690	555	225	1985
E78-15	B	5	186	206	676	701	590	225	2014
F78-15	B	5 1/2	195	216	691	717	635	225	2059
G78-15	B	5 1/2	204	225	703	729	680	225	2095
H78-15	B	6	217	239	720	748	750	225	2146
J78-15	B	6	220	243	729	758	780	225	2172
L78-15	B	6	224	248	744	774	830	225	2217
M78-15	B	6 1/2	237	262	753	784	880	225	2244
N78-15	B	7	248	274	766	797	930	225	2283
L84-15	B	6	219	242	752	783	830	225	2241
<p> <b>(S)</b> Belastningar LR C + D - se STRO P 311.01  <b>(FIN)</b> Kantavuus LR C + D - katso STRO P 311.01  <b>(GB)</b> Load capacities LR C + D - see STRO P 311.01                 </p>									

# SCANDINAVIAN TIRE & RIM ORGANIZATION

**N O R M - N O R M I**







**P 315.01**



**(S)** Personbilsdäck  
**(FIN)** Henkilöautonrenkaat  
**(GB)** Passenger Car Tyres

USA Diagonal Profil .70  
 USA Diagonal Poikkileikkaussuhde .70  
 USA Diagonal Aspect Ratio .70

Alfanum. dim.  
 Alfanumeeriset koot  
 Alpha-numeric

	LR							kPa	
			Norm	Max	Norm	Max			
A70-13	B	5	180	199	591	613	445	225	1761
B70-13	B	5	186	206	605	628	485	225	1803
C70-13	B	5 1/2	198	218	615	639	520	225	1833
D70-13	B	5 1/2	203	224	627	652	555	225	1868
C70-14	B	5	189	209	632	655	520	225	1883
D70-14	B	5 1/2	199	220	643	667	555	225	1916
E70-14	B	5 1/2	204	225	654	679	590	225	1949
F70-14	B	5 1/2	210	232	666	692	635	225	1985
G70-14	B	6	222	245	681	708	680	225	2029
H70-14	B	6	231	255	698	726	750	225	2080
J70-14	B	6 1/2	241	266	706	734	780	225	2104
L70-14	B	6 1/2	247	273	719	749	830	225	2143
A70-15	B	4 1/2	167	185	626	647	445	225	1865
C70-15	B	5 1/2	190	210	649	672	520	225	1934
D70-15	B	5 1/2	195	216	660	684	555	225	1967
E70-15	B	6	205	227	670	694	590	225	1997
F70-15	B	6	212	234	683	708	635	225	2035
G70-15	B	6	218	241	697	723	680	225	2077
H70-15	B	6	227	251	713	741	750	225	2125
J70-15	B	6 1/2	237	262	722	750	780	225	2152
K70-15	B	6 1/2	238	263	728	757	805	225	2169
L70-15	B	6 1/2	243	269	734	763	830	225	2187
<p><b>(S)</b> Belastningar LR C + D - se STRO P 311.01</p> <p><b>(FIN)</b> Kantavuus LR C + D - katso STRO P 311.01</p> <p><b>(GB)</b> Load capacities LR C + D - see STRO P 311.01</p>									

# SCANDINAVIAN TIRE & RIM ORGANIZATION

N O R M - N O R M I

P 317.01









(S) Personbilsdäck  
(FIN) Henkilöautonrenkaat  
(GB) Passenger Car Tyres

USA  
USA  
USA

Diagonal  
Diagonal  
Diagonal

Profil .60  
Poikkileikkaussuhde .60  
Aspect Ratio .60

Alfanum. dim.  
Alfanumeeriset koot  
Alpha-numeric

	LR							kPa	
			Norm	Max	Norm	Max			
A60-13	B	5 1/2	199	219	570	591	445	225	1697
B60-13	B	6	212	234	583	604	485	225	1737
C60-13	B	6	218	241	593	615	520	225	1767
D60-13	B	6 1/2	229	253	602	625	555	225	1794
B60-14	B	5 1/2	203	224	599	619	485	225	1785
C60-14	B	6	215	237	610	630	520	225	1785
D60-14	B	6	219	242	620	643	555	225	1847
E60-14	B	6 1/2	231	255	629	652	590	225	1874
F60-14	B	7	242	267	642	665	635	225	1913
G60-14	B	7	250	276	655	680	680	225	1952
H60-14	B	7	260	287	670	696	750	225	1967
J60-14	B	7	265	293	678	704	780	225	2020
L60-14	B	8	281	311	690	718	830	225	2056
B60-15	B	5 1/2	198	218	619	639	485	225	1845
C60-15	B	6	209	231	628	649	520	225	1871
E60-15	B	6	220	243	647	669	590	225	1928
F60-15	B	6 1/2	233	257	658	682	635	225	1961
G60-15	B	7	246	271	671	695	680	225	2000
H60-15	B	7	255	281	687	713	750	225	2047
J60-15	B	7	260	287	695	722	780	225	2071
L60-15	B	7	266	294	707	734	830	225	2107
<p>(S) Belastningar LR C + D - se STRO P 311.01</p> <p>(FIN) Kantavuus LR C + D - katso STRO P 311.01</p> <p>(GB) Load capacities LR C + D - see STRO P 311.01</p>									

# SCANDINAVIAN TIRE & RIM ORGANIZATION



**N O R M - N O R M I**

**P 312.01**



S Personbilsdäck  
 FIN Henkilöautonrenkaat  
 GB Passenger Car Tyres

USA  
 USA  
 USA

Diagonal  
 Diagonal  
 Diagonal

Profil .83  
 Poikkileikkauksuhde .83  
 Aspect Ratio .83

	LR							kPa	
			Norm	Max	Norm	Max			
6.45-14	B	4 1/2J	167		625		475	225	1863
	D						545	280	
6.95-14	B	5 J	178		642		520	225	1913
	D						595	280	
7.35-14	B	5 J	185		658		575	225	1961
	C						620	255	
	D						660	280	
7.75-14	B	5 1/2J	197		678		630	225	2020
	C						680	255	
	D						725	280	
8.25-14	B	6 J	208		693		680	225	2065
	D						785	280	
8.55-14	B	6 J	216		710		745	225	2116
	D						860	280	
8.85-14	B	6 1/2J	227		718		785	225	2140
	D						905	280	
9.00-14	B	6 1/2K	223		728		785	210	
	D						905	280	
9.50-14	B	6 1/2K	229		743		840	210	
	D						970	280	
6.85-15	B	5 J	175		658		520	225	1961
	D						600	280	
7.35-15	B	5 1/2J	190		678		585	225	2020
	C						630	255	
	D						670	280	
7.75-15	B	5 1/2J	195		691		630	225	2059
	C						675	255	
	D						725	280	
8.15-15	B	6 J	207		704		675	225	2098
	C						730	255	
	D						780	280	
8.25-15	B	6 J	208		704		680	225	2098
	D						785	280	
8.45-15	B	6 J	212		722		735	225	2152
	C						790	255	
	D						845	280	
8.55-15	B	6 J	215		724		745	225	2158
	C						805	255	
	D						860	280	
8.85-15	B	6 1/2J	224		734		785	225	2187
	C						845	255	
	D						900	280	
9.00-15	B	6 J	216		744		800	225	2217
	D						920	280	
9.15-15	B	6 1/2J	230		744		830	225	2217
	D						955	280	

# SCANDINAVIAN TIRE & RIM ORGANIZATION



N O R M - N O R M I

P 951.01

- (S)** Fälgar för USA-däck
- (FIN)** USA-renkaiden vanteet
- (GB)** Rims for USA Tyres

Dimension  
Koko  
Tyre Size

Godkända fälgar  
Hyväksytyt vanteet  
Approved Rims

A, AR78-13	4 1/2JJ, 4JJ, 5JJ, 5 1/2JJ, 6JJ
B78-13	5JJ, 4JJ, 4 1/2JJ, 5 1/2JJ, 6JJ, 6 1/2JJ
BR78-13	4 1/2JJ, 4JJ, 5JJ, 5 1/2JJ, 6JJ
C, CR78-13	5JJ, 4 1/2JJ, 5 1/2JJ, 6JJ, 6 1/2JJ
DR78-13	5 1/2JJ, 5JJ, 6JJ, 6 1/2JJ, 7JJ
DR78-13	5JJ, 5 1/2JJ, 6JJ, 6 1/2JJ, 7JJ
ER78-13	5 1/2JJ, 5JJ, 6JJ, 6 1/2JJ, 7JJ
A78-14	4 1/2JJ, 5JJ, 5 1/2JJ, 6JJ
AR78-14	4 1/2JJ, 4JJ, 5JJ, 5 1/2JJ
B78-14	4 1/2JJ, 4 1/2K, 5JJ, 5K, 5 1/2JJ, 6JJ
BR78-14	4 1/2JJ, 5JJ, 5 1/2JJ, 6JJ
C78-14	5JJ, 4 1/2JJ, 5K, 5 1/2JJ, 6JJ, 6 1/2JJ
CR78-14	5JJ, 4 1/2JJ, 5 1/2JJ, 6JJ
D78-14	5JJ, 4 1/2JJ, 5K, 5 1/2JJ, 6JJ, 6 1/2JJ
DR78-14	5JJ, 4 1/2JJ, 5 1/2JJ, 6JJ, 6 1/2JJ
E78-14	5 1/2JJ, 4 1/2JJ, 5JJ, 5K, 5 1/2K, 6JJ, 6 1/2JJ, 7JJ
ER78-14	5JJ, 5 1/2JJ, 6JJ, 6 1/2JJ, 7JJ
F78-14	5 1/2JJ, 5JJ, 5K, 5 1/2K, 6JJ, 6K, 6 1/2JJ, 7JJ
FR78-14	5 1/2JJ, 5JJ, 6JJ, 6 1/2JJ, 7JJ
G78-14	6JJ, 5JJ, 5 1/2JJ, 5 1/2K, 6K, 6 1/2JJ, 7JJ
GR78-14	6JJ, 5 1/2JJ, 6 1/2JJ, 7JJ
H78-14	6JJ, 5 1/2JJ, 6K, 6 1/2JJ, 6 1/2K, 7JJ, 8JJ
HR78-14	6JJ, 5 1/2JJ, 6 1/2JJ, 7JJ, 8JJ
J78-14	6JJ, 6K, 6 1/2JJ, 7JJ, 8JJ
JR78-14	6 1/2JJ, 6JJ, 7JJ, 8JJ

- (S)** JJ-fälg kan ersättas av J- eller JK-fälg
- (FIN)** JJ-vanne voidaan korvata J- tai JK-vanteella
- (GB)** Where JJ flange is specified, J or JK can also be used



# SCANDINAVIAN TIRE & RIM ORGANIZATION



N O R M - N O R M I

P 951.02

- (S)** Fälgar för USA-däck
- (FIN)** USA-renkaiden vanteet
- (GB)** Rims for USA Tyres

Dimension Koko Tyre Size	Godkända fälgar Hyväksytyt vanteet Approved Rims
A70-15	4 1/2JJ, 5JJ, 5 1/2JJ, 6JJ
BR70-15	4 JJ, 4 1/2JJ, 5JJ, 5 1/2JJ, 6JJ, 6 1/2JJ
C, CR70-15	5 1/2JJ, 5JJ, 6JJ, 6 1/2JJ
D, DR70-15	5 1/2JJ, 5JJ, 6JJ, 6 1/2JJ, 7JJ
E70-15	6JJ, 5JJ, 5 1/2JJ, 6 1/2JJ, 7JJ, 8JJ
ER70-15	5 1/2JJ, 5JJ, 6JJ, 6 1/2JJ, 7JJ
F70-15	6JJ, 5 1/2JJ, 6 1/2JJ, 7JJ, 8JJ
FR70-15	6JJ, 5 1/2JJ, 6 1/2JJ, 7JJ
G, GR70-15	6JJ, 5 1/2JJ, 6 1/2JJ, 7JJ, 8JJ
H70-15	6JJ, 6 1/2JJ, 7JJ, 8JJ
HR70-15	6 1/2JJ, 6JJ, 7JJ, 8JJ
J, JR70-15	6 1/2JJ, 6JJ, 7JJ, 8JJ
K, KR70-15	6 1/2JJ, 6JJ, 7JJ, 8JJ
L70-15	6 1/2JJ, 7JJ, 8JJ, 9JJ
LR70-15	6 1/2JJ, 6JJ, 7JJ, 8JJ, 9JJ
MR70-15	7JJ, 6JJ, 6 1/2JJ, 8JJ, 9JJ
A, AR60-13	5 1/2JJ, 5JJ, 6JJ, 6 1/2JJ, 7JJ
B, BR60-13	6JJ, 5 1/2JJ, 6 1/2JJ, 7JJ
C60-13	6JJ, 5 1/2JJ, 6 1/2JJ, 7JJ, 8JJ
D60-13	6 1/2JJ, 6JJ, 7JJ, 8JJ
ER60-13	6 1/2JJ, 6JJ, 7JJ, 8JJ
AR60-14	5 1/2JJ, 5JJ, 6JJ, 7JJ
B60-14	5 1/2JJ, 6JJ, 6 1/2JJ, 7JJ
D60-14	6JJ, 5 1/2JJ, 6 1/2JJ, 7JJ, 8JJ
E60-14	6 1/2JJ, 6JJ, 7JJ, 8JJ
F60-14	7JJ, 6JJ, 6 1/2JJ, 8JJ
FR60-14	6 1/2JJ, 6JJ, 7JJ, 8JJ
G, GR60-14	7JJ, 6 1/2JJ, 8JJ, 9JJ
H60-14	7JJ, 6 1/2JJ, 8JJ, 9JJ
J, JR60-14	7JJ, 8JJ, 9JJ
L, LR60-14	8JJ, 7JJ, 9JJ, 10JJ
B60-15	5 1/2JJ, 5JJ, 6JJ, 6 1/2JJ, 7JJ
C60-15	6JJ, 5 1/2JJ, 6 1/2JJ, 7JJ, 7K
E, ER60-15	6JJ, 5 1/2JJ, 6 1/2JJ, 7JJ, 8JJ
F, FR60-15	6 1/2JJ, 6JJ, 7JJ, 8JJ
G60-15	7JJ, 6JJ, 6 1/2JJ, 8JJ, 9JJ
GR60-15	6 1/2JJ, 6JJ, 7JJ, 8JJ, 9JJ
H60-15	7JJ, 6 1/2JJ, 8JJ, 8K, 9JJ
HR60-15	7JJ, 6 1/2JJ, 8JJ, 9JJ
J, JR60-15	7JJ, 6 1/2JJ, 8JJ, 9JJ
L, LR60-15	7JJ, 8JJ, 9JJ, 10JJ

- (S)** JJ-fälg kan ersättas av J- eller JK-fälg
- (FIN)** JJ-vanne voidaan korvata J- tai JK-vanteella
- (GB)** Where JJ flange is specified, J or JK can also be used

# SCANDINAVIAN TIRE & RIM ORGANIZATION



N O R M - N O R M I

P 951.03

- (S)** Fälgar för USA-däck
- (FIN)** USA-renkaiden vanteet
- (GB)** Rims for USA Tyres

Dimension Koko Tyre Size	Godkända fälgar Hyväksytyt vanteet Approved Rims
A, AR78-15	<b>4 1/2JJ, 4JJ, 5JJ, 5 1/2JJ</b>
B, BR78-15	<b>4 1/2JJ, 5JJ, 5 1/2JJ, 6JJ</b>
C78-15	<b>5JJ, 4 1/2JJ, 4 1/2K, 5K, 5 1/2JJ, 5 1/2K, 6JJ</b>
CR78-15	<b>5JJ, 4 1/2JJ, 5 1/2JJ, 5 1/2K, 6JJ</b>
D78-15	<b>5JJ, 4 1/2JJ, 5K, 5 1/2JJ, 6JJ, 6 1/2JJ</b>
DR78-15	<b>5JJ, 4 1/2JJ, 5 1/2JJ, 6JJ, 6 1/2JJ</b>
E78-15	<b>5JJ, 4 1/2JJ, 4 1/2K, 5K, 5 1/2JJ, 5 1/2K, 6JJ, 6 1/2JJ</b>
ER78-15	<b>5 1/2JJ, 5JJ, 6JJ, 6 1/2JJ</b>
F78-15	<b>5 1/2JJ, 4 1/2JJ, 4 1/2K, 5JJ, 5K, 5 1/2K, 6JJ, 6 1/2JJ, 7JJ</b>
FR78-15	<b>5 1/2JJ, 5JJ, 5 1/2K, 6JJ, 6 1/2JJ, 7JJ</b>
G78-15	<b>5 1/2JJ, 5JJ, 5K, 5 1/2K, 6JJ, 6K, 6L, 6 1/2JJ, 7JJ</b>
GR78-15	<b>6JJ, 5JJ, 5 1/2JJ, 6 1/2JJ, 7JJ</b>
H78-15	<b>6JJ, 5 1/2JJ, 5 1/2K, 6K, 6L, 6 1/2JJ, 7JJ</b>
HR78-15	<b>6JJ, 5 1/2JJ, 5 1/2K, 6 1/2JJ, 7JJ</b>
J78-15	<b>6JJ, 5 1/2JJ, 6K, 6L, 6 1/2JJ, 7JJ, 8JJ</b>
JR78-15	<b>6 1/2JJ, 5 1/2JJ, 5 1/2K, 6JJ, 7JJ, 8JJ</b>
L78-15	<b>6JJ, 5 1/2JJ, 5 1/2K, 6K, 6L, 6 1/2JJ, 7JJ, 8JJ</b>
LR78-15	<b>6 1/2JJ, 6JJ, 7JJ, 8JJ</b>
M, MR78-15	<b>6 1/2JJ, 6JJ, 7JJ, 8JJ</b>
N78-15	<b>7JJ, 6JJ, 6 1/2JJ, 8JJ, 9JJ</b>
NR78-15	<b>7JJ, 6JJ, 6 1/2JJ, 8JJ</b>
L84-15	<b>6JJ, 5 1/2JJ, 6 1/2JJ, 7JJ, 8JJ</b>
A, AR70-13	<b>5JJ, 4 1/2JJ, 5 1/2JJ, 6JJ, 6 1/2JJ</b>
B70-13	<b>5JJ, 5 1/2JJ, 6JJ, 6 1/2JJ</b>
BR70-13	<b>5 1/2JJ, 5JJ, 6JJ, 6 1/2JJ, 7JJ</b>
C, CR70-13	<b>5 1/2JJ, 5JJ, 6JJ, 6 1/2JJ, 7JJ</b>
D, DR70-13	<b>5 1/2JJ, 6JJ, 6 1/2JJ, 7JJ</b>
C70-14	<b>5JJ, 5 1/2JJ, 6JJ, 6 1/2JJ, 7JJ</b>
CR70-14	<b>5 1/2JJ, 5JJ, 6JJ, 6 1/2JJ, 7JJ</b>
D, DR70-14	<b>5 1/2JJ, 5JJ, 6JJ, 6 1/2JJ, 7JJ</b>
E70-14	<b>5 1/2JJ, 5JJ, 6JJ, 6 1/2JJ, 7JJ</b>
ER70-14	<b>5 1/2JJ, 6JJ, 6 1/2JJ, 7JJ</b>
F70-14	<b>5 1/2JJ, 6JJ, 6 1/2JJ, 7JJ, 8JJ</b>
FR70-14	<b>6JJ, 5 1/2JJ, 6 1/2JJ, 7JJ</b>
G, GR70-14	<b>6JJ, 6 1/2JJ, 7JJ, 8JJ</b>
H70-14	<b>6JJ, 6 1/2JJ, 7JJ, 8JJ</b>
HR70-14	<b>6 1/2JJ, 6JJ, 7JJ, 8JJ</b>
J70-14	<b>6 1/2JJ, 6JJ, 6 1/2JJ, 7JJ, 8JJ</b>
JR70-14	<b>6 1/2JJ, 7JJ, 8JJ, 9JJ</b>
L, LR70-14	<b>6 1/2JJ, 7JJ, 8JJ, 9JJ</b>

- (S)** JJ-fälg kan ersättas av J- eller JK-fälg
- (FIN)** JJ-vanne voidaan korvata J- tai JK-vanteella
- (GB)** Where JJ flange is specified, J or JK can also be used

# SCANDINAVIAN TIRE & RIM ORGANIZATION



NORM - NORMI

P 951.04

- (S)** Fälgar för USA-däck
- (FIN)** USA-renkaiden vanteet
- (GB)** Rims for USA Tyres

Dimension Koko Tyre Size	Godkända fälgar Hyväksytyt vanteet Approved Rims
B, BR50-13	<b>6 1/2JJ</b> , 6JJ, 7JJ, 8JJ
C, CR50-13	<b>6 1/2JJ</b> , 6JJ, 7JJ, 8JJ
D50-13	<b>7JJ</b> , 6 1/2JJ, 8JJ, 9JJ
F50-14	<b>7JJ</b> , 6 1/2JJ, 8JJ, 9JJ
G, GR50-14	<b>8JJ</b> , 7JJ, 9JJ, 10JJ
H50-14	<b>8JJ</b> , 9JJ, 10JJ
JR50-14	<b>8JJ</b> , 9JJ, 10JJ
M50-14	<b>9JJ</b> , 8JJ, 10JJ, 11JJ
N50-14	<b>9JJ</b> , 10JJ, 11JJ, 12JJ
B50-15	<b>6JJ</b> , 5 1/2JJ, 6 1/2JJ, 7JJ
E50-15	<b>6 1/2JJ</b> , 6JJ, 7JJ, 8JJ
G, GR50-15	<b>7JJ</b> , 8JJ, 9JJ
H, HR50-15	<b>8JJ</b> , 7JJ, 9JJ, 10JJ
JR50-15	<b>8JJ</b> , 9JJ, 10JJ
L, LR50-15	<b>8JJ</b> , 9JJ, 10JJ
N50-15	<b>9JJ</b> , 8JJ, 10JJ, 11JJ

- (S)** JJ-fälg kan ersättas av J- eller JK-fälg
- (FIN)** JJ-vanne voidaan korvata J-tai JK-vanteella
- (GB)** Where JJ flange is specified, J or JK can also be used

# SCANDINAVIAN TIRE & RIM ORGANIZATION



N O R M - N O R M I

P 950.09 A

(S) Dimension  
(FIN) Koko  
(GB) Tyre Size

Godkända fälgar  
Hyväksytyt vanteet  
Approved Rims

## '95' SUPER BALLOON SERIES - DIAGONAL

5.20-10	3.50B, 3.50D, 3 1/2J, 4.00B, 4.00C, 4J, 4.50B, 4.50C, 4 1/2J, 5.00C
5.20-12	3.00D, 3.50B, 3 1/2J, 4.00B, 4.00C, 4J, 4.50B, 4.50C, 4 1/2J
5.20-13	3.50D, 3 1/2J, 4.00C, 4J, 4.50C, 4 1/2J, 4 1/2K
5.20-14	3.00D, 3.50D, 3 1/2J, 4.00C, 4J, 4.50C, 4 1/2J
5.20-15	3.00D, 3.50D, 3 1/2J, 4.00E, 4J, 4 1/2J, 4 1/2K
5.60-12	3.50B, 3 1/2J, 4.00B, 4.00C, 4J, 4.50C, 4 1/2J
5.60-13	3.50D, 3 1/2J, 4.00E, 4J, 4.50E, 4 1/2J, 4 1/2K
5.60-14	3.00D, 3.50D, 3 1/2J, 4.00C, 4J, 4.50C, 4 1/2J
5.60-15	3.50D, 3 1/2J, 4.00E, 4J, 4.50E, 4 1/2J, 4 1/2K, 5J, 5K
5.90-13	3.50D, 3 1/2J, 4.00E, 4J, 4.50E, 4 1/2J, 4 1/2K, 5 1/2J
5.90-14	3.50D, 3 1/2J, 4.00E, 4J, 4.50E, 4 1/2J, 4 1/2K, 5J
5.90-15	3.50D, 4.00E, 4J, 4.50E, 4 1/2J, 4 1/2K
6.40-13	4.00E, 4J, 4.50E, 4 1/2J, 4 1/2K, 5J, 5K, 5 1/2J, 5 1/2K
6.40-14	4.00E, 4J, 4.50E, 4 1/2J, 4 1/2K, 5J, 5K
6.40-15	4J, 4.50E, 4 1/2J, 4 1/2K, 5.00E, 5.00F, 5J, 5K, 5 1/2J, 5 1/2K
6.70-13	4.50E, 4 1/2J, 4 1/2K, 5J, 5K, 5 1/2J, 5 1/2K
6.70-15	4.50E, 4 1/2J, 4 1/2K, 5.00F, 5J, 5K, 5 1/2J, 5 1/2K
7.10-15	4 1/2J, 4 1/2K, 5.00F, 5J, 5K, 5.50F, 5 1/2K, 6L
7.60-15	5J, 5K, 5.50F, 5 1/2K, 6K, 6L
8.00-15	5 1/2K, 6J, 6L, 6 1/2J, 6 1/2K, 6 1/2L
8.20-15	5 1/2K, 6J, 6L, 6 1/2J, 6 1/2K, 6 1/2L

## '88' LOW SECTION SERIES - DIAGONAL

5.00-12	3.50B, 3 1/2J, 4.00B, 4.00C, 4J, 4.50B, 4.50C, 4 1/2J
5.00-13	3.50B, 3.50D, 3 1/2J, 4J, 4 1/2J
5.50-12	3.50B, 3 1/2J, 4.00B, 4.00C, 4J, 4.50B, 4.50C, 4 1/2J
5.50-13	3.50D, 3 1/2J, 4J, 4 1/2J, 4 1/2K, 5J
5.50-15L	3 1/2J, 4J, 4 1/2J, 4 1/2K
6.00-12	4.00B, 4J, 4.50B, 4.50C, 4 1/2J, 5.00C, 5J
6.00-13	4.00C, 4J, 4.50C, 4 1/2J, 4 1/2K, 5J, 5 1/2J
6.00-14	4.00C, 4J, 4.50C, 4 1/2J, 5J, 5 1/2J
6.00-15L	4J, 4 1/2J, 4 1/2K, 5J
6.50-13	4J, 4 1/2J, 4 1/2K, 5J, 5K, 5 1/2J, 5 1/2K
6.50-14	4J, 4 1/2J, 4 1/2K, 5J, 5K, 5 1/2J, 5 1/2K
6.50-15L	4J, 4 1/2J, 4 1/2K, 5J
7.00-13	4 1/2J, 4 1/2K, 5J, 5K, 5 1/2J, 5 1/2K, 6K
7.00-14	4 1/2J, 5J, 5K, 5 1/2J, 5 1/2K, 6J
7.00-15L	4 1/2J, 4 1/2K, 5J, 5K, 5.50F, 5 1/2K, 6J
7.25-13	4 1/2J, 4 1/2K, 5J, 5K, 5 1/2J, 5 1/2K, 6J, 6K
7.50-13	5J, 5K, 5 1/2J, 5 1/2K, 6J, 6K
7.50-14	5J, 5K, 5 1/2J, 5 1/2K, 6J, 6K
8.00-14	5J, 5K, 5 1/2J, 5 1/2K, 6J, 6K, 6L, 6 1/2K
8.50-14	5K, 5 1/2J, 5 1/2K, 6J, 6K, 6L, 6 1/2J, 6 1/2K
9.00-15	6J, 6 1/2J, 7J

1. Where a J flange is specified, JJ and JK can also be used.

2. B rims of German manufacture are not marked with a 'B'

# SCANDINAVIAN TIRE & RIM ORGANIZATION



N O R M - N O R M I

P 950.09 B

<b>S</b>	<b>Dimension</b>	<b>Godkända fälgar</b>
<b>FIN</b>	<b>Koko</b>	<b>Hyväksytyt vanteet</b>
<b>GB</b>	<b>Tyre Size</b>	<b>Approved Rims</b>

## '82' SUPER LOW SECTION SERIES - DIAGONAL

125-12/5.35-12	3.50B, 3 1/2J, 4.00B, 4.00C, 4J, 4.50B, 4.50C, 4 1/2J
125-15/5.35-15	3 1/2J, 4.00C, 4J, 4.50C
135-12/5.65-12	3.50B, 3 1/2J, 4.00B, 4.00C, 4J, 4.50B, 4.50C, 4 1/2J
135-13/5.65-13	3.50B, 3 1/2J, 4.00B, 4.00C, 4J, 4.50B, 4.50C, 4 1/2J
135-14/5.65-14	3 1/2J, 4.00C, 4J, 4.50C, 4 1/2J
135-15/5.65-15	3 1/2J, 4.00C, 4J, 4.50C, 4 1/2J
145-10/5.95-10	3.50B, 3 1/2J, 4.00B, 4.00C, 4J, 4.50B, 4.50C, 4 1/2J
145-12/5.95-12	3.50B, 3 1/2J, 4.00B, 4.00C, 4J, 4.50B, 4.50C, 4 1/2J
145-13/5.95-13	3.50B, 3 1/2J, 4.00B, 4.00C, 4J, 4.50B, 4.50C, 4 1/2J
145-14/5.95-14	3 1/2J, 4.00C, 4J, 4.50C, 4 1/2J
145-15/5.95-15	3 1/2J, 4.00C, 4J, 4.50C, 4 1/2J
155-12/6.15-12	3.50B, 3 1/2J, 4.00B, 4.00C, 4J, 4.50B, 4.50C, 4 1/2J
155-13/6.15-13	4.00C, 4J, 4.50C, 4 1/2J, 4 1/2K, 5J, 5K, 5 1/2J
155-14/6.15-14	4.00C, 4J, 4.50C, 4 1/2J, 4 1/2K, 5J, 5K
155-15/6.35-15	4J, 4 1/2J, 4 1/2K, 5J, 5K, 5 1/2J, 5 1/2K
165-13/6.45-13	4J, 4K, 4.50C, 4 1/2J, 4 1/2K, 5J, 5K, 5 1/2J, 5 1/2K
165-14/6.45-14	4J, 4K, 4.50C, 4 1/2J, 4 1/2K, 5J, 5K, 5 1/2J
165-15/6.85-15	4J, 4 1/2J, 4 1/2K, 5J, 5K, 5 1/2J, 5 1/2K
175-13/6.95-13	4 1/2J, 4 1/2K, 5J, 5K, 5 1/2J, 5 1/2K, 6J
175-14/6.95-14	4 1/2J, 4 1/2K, 5J, 5K, 5 1/2J, 5 1/2K, 6J
175-15/7.15-15	4 1/2K, 5J, 5K, 5 1/2J, 5 1/2K, 6J
185-13/7.35-13	4 1/2J, 5J, 5K, 5 1/2J, 5 1/2K, 6J, 6K
185-14/7.35-14	5J, 5K, 5 1/2J, 5 1/2K, 6J, 6K, 6 1/2J, 6 1/2K
185-15/7.35-15	4 1/2J, 4 1/2K, 5J, 5K, 5 1/2J, 5 1/2K, 6J, 6K
195-14/7.75-14	5J, 5K, 5 1/2J, 5 1/2K, 6J, 6K, 6 1/2J, 6 1/2K, 7J, 7K
195-15/7.75-15	5J, 5K, 5 1/2J, 5 1/2K, 6J, 6K, 6 1/2J, 6 1/2K
205-14/8.25-14	5 1/2J, 5 1/2K, 6J, 6K, 6L, 6 1/2J, 6 1/2K, 6 1/2L, 7K, 7L
205-15/8.15-15	5 1/2J, 5 1/2K, 6J, 6K, 6L, 6 1/2K, 6 1/2L, 7K, 7L
215-14/8.55-14	5 1/2J, 5 1/2K, 6J, 6L, 6 1/2J, 6 1/2K, 6 1/2L, 7K, 7L, 7 1/2K, 7 1/2L
215-15/8.85-15	5 1/2J, 6J, 6L, 6 1/2J, 6 1/2K, 6 1/2L, 7K, 7L, 7 1/2K, 7 1/2L
225-14/8.85-14	6J, 6L, 6 1/2J, 6 1/2L, 7K, 7L, 7 1/2K, 7 1/2L, 8K, 8L
225-15/9.15-15	6J, 6L, 6 1/2J, 6 1/2L
235-15	6 1/2J

1. Where a J flange is specified, JJ and JK can also be used.
2. B rims of German manufacture are not marked with a 'B'

# SCANDINAVIAN TIRE & RIM ORGANIZATION



NORM - NORM I

P 951.01A

- (S)** Fälgar för USA-däck
- (FIN)** USA-renkaiden vanteet
- (GB)** Rims for USA Tyres

Dimension  
Koko  
Tyre Size

Godkända fälgar  
Hyväksytyt vanteet  
Approved Rims

6.45-14	<b>4 1/2JJ, 4 1/2K, 5JJ, 5K</b>
6.95-14	<b>5JJ, 4 1/2JJ, 5K, 5 1/2JJ, 6JJ</b>
7.35-14	<b>5JJ, 4 1/2JJ, 5K, 5 1/2JJ, 5 1/2K, 6JJ</b>
7.75-14	<b>5 1/2JJ, 5JJ, 5K, 5 1/2K, 6JJ, 6K, 6 1/2JJ, 7JJ</b>
8.25-14	<b>6JJ, 5JJ, 5 1/2JJ, 5 1/2K, 6K, 7JJ</b>
8.55-14	<b>6JJ, 5 1/2JJ, 6K, 6 1/2JJ, 6 1/2K</b>
8.85-14	<b>6 1/2JJ, 6JJ, 6K</b>
6.85-15	<b>5JJ, 4 1/2JJ, 4 1/2K, 5K, 5 1/2JJ, 5 1/2K</b>
7.35-15	<b>5 1/2JJ, 4 1/2JJ, 4 1/2K, 5JJ, 5K, 5 1/2K, 6JJ</b>
7.75-15	<b>5 1/2JJ, 4 1/2JJ, 4 1/2K, 5JJ, 5K, 5 1/2K, 6JJ, 6 1/2JJ, 7JJ</b>
8.15-15	<b>6JJ, 5JJ, 5K, 5 1/2JJ, 5 1/2K, 6K, 6L</b>
8.25-15	<b>6JJ, 5JJ, 5K, 5 1/2JJ, 5 1/2K, 6K, 6L, 6 1/2JJ</b>
8.45-15	<b>6JJ, 5 1/2JJ, 5 1/2K, 6K, 6L, 6 1/2K</b>
8.55-15	<b>6JJ, 5 1/2JJ, 5 1/2K, 6K, 6L, 6 1/2JJ</b>
8.85-15	<b>6 1/2JJ, 6JJ, 6K, 6L</b>
9.00-15	<b>6JJ</b>
9.15-15	<b>6 1/2JJ, 5 1/2JJ, 5 1/2K, 6JJ, 6K, 6L</b>

- (S)** JJ-fälg kan ersättas av J- eller JK-fälg
- (FIN)** JJ-vanne voidaan korvata J- tai JK-vanteella
- (GB)** Where JJ flange is specified, J or JK can also be used



**I N D E X**

<b>L - COMMERCIAL VEHICLE TYRES</b>	Page
<b>Light Commercial Vehicle Tyres - Diagonal - 5° rim</b>	
L 201.01      Code Designated Sizes	2
<b>Commercial Vehicle Tyres - Diagonal - 5° rim</b>	
L 301.01-02      Code Designated Sizes	3-4
<b>Light Commercial Vehicle Tyres - LT Tyres - 5° + 15° DC rim</b>	
<b>Commercial Vehicle Tyres - Diagonal/Radial - 15° DC rim</b>	
L 701.01-02      LT - Code Designated and Alpha-numeric Sizes	5-6
<b>Alternative Rims</b>	
L 950.02      Recommended and Permitted Rims	7
L 950.06B	8

# SCANDINAVIAN TIRE & RIM ORGANIZATION



N O R M - N O R M I

L 201.01

(S) Lätta lastbilsdäck "C" Tumdimensioner Diagonal 5° fälg  
(FIN) Kevyet kuorma-autonrenkaat "C" Tuumakoot Ristikudos 5° vanne  
(GB) Light Commercial Vehicle Tyres "C" Code Designated Sizes Diagonal 5° rim

	PR	L I								kPa	
				Norm	Max	Norm	Max	↓	↓↓		
6.00-16 C	6 8 10	95/92 98/97 103/101	4.50 E	170	184	730	746	690 750 875	630 730 825	325 375 500	2175
6.00-18 C	6 8 10	95/93 99/97 104/102	4.00 E	165		786		690 775 900	650 730 850	300 375 500	2342
6.00-20 C	6 8 10	96/93 100/99 104/102	5.0	172		842		710 800 900	650 775 850	300 375 500	2509
6.50-16 C	6 8 10	98/97 104/102 108/107	4.50 E	176	190	748	765	750 900 1000	730 850 975	325 425 500	2229
6.50-20 C	6 8	104/102 110/108	5.0	181	195	870	888	900 1060	850 1000	325 425	2593
7.00-16 C	6 8 10	102/100 108/106 113/112	5.50 F	198	214	778	797	850 1000 1150	800 950 1120	300 400 525	2318
7.00-18 C	8 10	110/108 113/112	5.5	198	214	848	867	1060 1150	1000 1120	400 475	2527
7.00-20 C	6 8 10	108/106 113/111 116/114	5.5	198	214	898	917	1000 1150 1250	950 1090 1180	325 400 475	2676
7.50-16 C	6 8 10	108/106 112/110 116/114	6.00 G	210	227	806	826	1000 1120 1250	950 1060 1180	350 400 475	2402
7.50-17 C	8 10	113/112 116/115	6.0	210	227	852	872	1150 1250	1120 1215	400 450	2539
7.50-18 C	8	115/113	6.0	215		884		1215	1150	450	2634
8.25-16 C	8 10	116/115 120/119	6.50 H	234	253	860	883	1250 1400	1215 1360	375 450	2563
9.00-16 C	8 10	119/117 122/120	6.50 H	252	272	900	925	1360 1500	1285 1400	375 450	2682
6.50-17LC	6 8 10	95/92 99/97 102/100	4.50	166	179	726	741	690 775 850	630 730 800	325 400 475	2163

kg



# SCANDINAVIAN TIRE & RIM ORGANIZATION

N O R M - N O R M I

L 301.01



(S) Lastbilsdäck  
(FIN) Kuorma-autonrenkaat  
(GB) Commercial Vehicle Tyres

Tumdimensioner  
Tuumakoot  
Code Designated Sizes

Diagonal  
Ristikudos  
Diagonal

5° fälg  
5° vanne  
5° rim

◎	PR	L I	◎	◎		◎		↓ ↓ ↓		kPa	◎
				Norm	Max	Norm	Max				
6.50-16	12	111/110	4.50E	176	190	748	765	1090	1060	575	2259
7.00-16	12	117/116	5.50F	198	214	774	792	1285	1250	600	2337
7.00-20	12	120/118	5.5	198	214	898	917	1400	1320	575	2712
7.50-15	12 14 16		6.0					1300 1400 1500	1250 1350 1450	600 700 750	
7.50-16	12	121/120	6.00G	210	227	806	826	1450	1400	650	2434
7.50-17	12	123/122	6.0	210	227	852	872	1550	1500	675	2573
7.50-20	8 10 12	120/177 123/122 128/127	6.0	213	230	928	949	1400 1550 1800	1285 1500 1750	475 550 675	2803
8.25-15	10 12 14 16 18		6.5	234	253	836	859	1450 1600 1700 1875 2000	1325 1475 1575 1725 1850	525 600 650 750 850	2525
8.25-16	12 14	125/124 128/126	6.50H	234	253	860	883	1650 1800	1600 1700	575 650	2597
8.25-17	10 12 14	123/120 126/123 130/128	6.5	234	253	895	918	1550 1700 1900	1400 1550 1800	500 575 675	2703
8.25-20	10 12 14	126/124 130/128 133/131	6.5	234	253	970	993	1700 1900 2060	1600 1800 1950	525 600 675	2929
9.00-16	12 14	132/128 134/131	6.50H	252	272	900	925	2000 2120	1800 1950	625 725	2718
9.00-20	10 12 14	133/129 136/133 140/137	7.0	256	276	1012	1037	2060 2240 2500	1850 2060 2300	550 625 700	3056
10.00-15	12 14 16 20		7.5	275	297	926	953	2050 2300 2450 2750	1850 2075 2225 2525	600 700 775 950	2797
10.00-20	12 14 16	137/134 142/139 146/143	7.5	275	297	1050	1077	2300 2650 3000	2120 2430 2725	550 650 750	3171

# SCANDINAVIAN TIRE & RIM ORGANIZATION



N O R M - N O R M I

L 301.02



S Lastbilsdäck  
FIN Kuorma-autonrenkaat  
GB Commercial Vehicle Tyres

Tumdimensioner  
Tuumakoot  
Code Designated Sizes

Diagonal 5° fälg  
Ristikudos 5° vanne  
Diagonal 5° rim

⊙	PR	L I								kPa	
				Norm	Max	Norm	Max				
11.00-15	16		8.0					2600	2450	750	
11.00-20	12	142/138	8.0	291	314	1080	1109	2650	2360	575	3262
	14	146/143						3000	2725	675	
	16	149/145						3250	2900	725	
11.1-20	16		7.50	275	301	1061	1087	2750	2510	750	
11.00-22	12	143/140	8.0	291	314	1130	1159	2725	2500	575	3413
	14	147/144						3075	2800	650	
	16	150/146						3350	3000	725	
11.00-24	12	144/141	8.0	291	314	1180	1209	2800	2575	575	3564
	14	148/144						3150	2800	650	
	16	151/147						3450	3075	725	
12.00-20	14	145/142	8.5	312	337	1120	1151	2900	2650	575	3382
	16	150/146						3350	3000	675	
	18	154/149						3750	3250	775	
		154/150						3750	3350	775	
x	20	157						4125		900	
12.00-24	14	148/145	8.5	312	337	1220	1251	3150	2900	575	3684
	16	153/149						3650	3250	675	
	18	156/153						4000	3650	775	
x	20	160/156						4500	4000	900	
x 13.00-20	16	154/149	9.0	342	369	1170	1203	3750	3250	625	3533
x	18	158						4250		725	
x	20	161						4625		800	
x 14.00-20	18	160	10.0	375	405	1238	1274	4500		700	3739
x	20	162						4750		750	
x	22	164						5000		800	
x 14.00-24	18	164	10.0	375	405	1340	1377	5000		700	4047
x	20	166						5300		750	
x	22	168						5600		800	
x 15.00-20	20	166	11.25	412	445	1295	1344	5300		650	3911
x	22	169						5800		750	
x	24	172						6300		850	

(S) X = om inte annat angivits gäller hastighetskod F = 80 km/h för dessa däck

(FIN) X = jollei muuta ole ilmoitettu, on nopeustunnus F = 80 km/h voimassa näille renkaille

(GB) X = where no service description is marked on the tyre, speed symbol F applies








# SCANDINAVIAN TIRE & RIM ORGANIZATION

N O R M - N O R M I

L 701.01



(S) Lätta lastbilsdäck Tumdimensioner Diagonal Radial + 35 kPa  
(FIN) Kevyet kuorma-autonrenkaat Tuumakoot Ristikudos Radial + 35 kPa  
(GB) Light Commercial Vehicle Tyres Code Designated Sizes Diagonal Radial + 35 kPa

	PR	L I								kPa							
				Norm	Max	Norm	Max										
7-14.5 LT	8		6	185	206	677	707	850	750	485							
	10											950	835	585			
	12														1045	915	690
8-14.5 LT	8		6	203	226	707	740	1030	910	485							
	10											1155	1020	585			
	12														1265	1115	690
9-14.5 LT	8		7	241	268	711	745	1190	1050	485							
	10											1335	1175	585			
	12														1465	1290	690
7-17.5 LT	6		5.25	189	210	758	796	825	725	310							
	8											975	855	415			
	10														1110	980	520
8-17.5 LT	6		5.25	199	221	788	829	945	825	310							
	8											1115	980	415			
	10														1270	1115	520
10-17.5 LT	6		8.25	264	291	787	818	1100	970	310							
	8											1305	1145	415			
	10														1485	1310	520
	12														1655	1455	620
8.00-16.5 LT	4		6	203	224	720	747	620	545	210							
	6											785	690	310			
	8														930	820	415
	10														1060	930	520
	12														1175	1035	620
8.75-16.5 LT	4		6.75	222	245	748	778	715	630	210							
	6											905	795	310			
	8														1065	940	415
	10														1215	1070	520
	12														1355	1190	620
9.50-16.5 LT	4		6.75	241	265	776	808	845	745	210							
	6											1065	940	310			
	8														1260	1110	415
	10														1440	1265	520
	12														1610	1415	620
10-16.5 LT	4		8.25	264	291	762	793	835	735	210							
	6											1060	930	310			
	8														1250	1100	415
	10														1425	1255	520
	12														1610	1415	620
12-16.5 LT	6		9.75	307	338	818	854	1075	950	210							
	8											1360	1200	310			
	10														1610	1415	415
	12														1835	1615	520








# SCANDINAVIAN TIRE & RIM ORGANIZATION



**N O R M - N O R M I**  
**(S)** Lätta Lastbilsdäck  
**(FIN)** Kevyetkuorma-autonrenkaat  
**(GB)** Light Commercial Vehicle Tyres

Tum- + alfanum. dim.  
 Tuuma- + alfanumeeriset koot  
 Code Designated + Alpha Num.

**L 701.02**  
 Diagonal Radial + 35 kPa  
 Ristikudos Radial + 35 kPa  
 Diagonal Radial + 35 kPa

	P R								kPa	
			Norm	Max	Norm	Max				
7.9-14 LT	4	7	208	229	645	671	455		210	
	6								310	
	8								415	
8.5-14 LT	4	7	216		667		510		210	
	6								310	
9-15 LT	4	8	254	279	744	777	710		210	
	6								310	
	8								415	
10-15 LT	4	8	264	291	773	808	800		210	
	6								310	
	8								415	
10-16 LT	4	8	264	291	798	833	835		210	
	6								310	
	8								415	
11-14 LT	4	8	279	307	752	787	825		210	
	6								310	
	8								415	
11-15 LT	4	8	279	307	777	813	865		210	
	6								310	
	8								415	
11-16 LT	4	8	279	307	803	838	900		210	
	6								310	
	8								415	
12-15 LT	4	10	318	349	823	863	1020		210	
	6								310	
	8								415	
E 78-14 LT	6	5.5	199	221	666	697	655	580	310	
	8								415	
	10								520	
G 78-14 LT	6	6	212	235	686	719	725	635	310	
	8								415	
C 78-15 LT	6	5	187	207	672	701	625	545	310	
	8								415	
	10								520	
G 78-15 LT	6	6	212	235	711	744	755	665	310	
	8								415	
	10								520	
H 78-15 LT	6	6	222	247	727	762	830	730	310	
	8								415	
	10								520	
L 78-15 LT	6	6.5	236	262	749	786	920	815	310	
	8								415	
	10								520	
F 78-16 LT	6	5.5	202	224	721	752	735	645	310	
	8								415	
	10								520	
H 78-16 LT	6	6	222	247	753	787	870	765	310	
	8								415	
	10								520	
L 78-16 LT	6	6.5	236	262	775	812	960	845	310	
	8								415	
	10								520	
klg-93 (Obsolite)										

# SCANDINAVIAN TIRE & RIM ORGANIZATION

L 950.02



N O R M - N O R M I

(S) Dimension  
(FIN) Koko  
(GB) Tyre size

Godkända fälgar  
Hyväksytyt vanteet  
Approved Rims

L 201.01, L 301.01-02

6.00-16	C	<b>4.50E SDC, 4 1/2 J, 5.00E SDC</b>
6.00-18	C	<b>4.00E</b>
6.00-20	C	<b>5.0, B5.0</b>
6.50-16	C	<b>4.50E SDC, 4 1/2 J, 5.00E SDC, 5.50F SDC</b>
6.50-17	C	<b>5.0, 5.00S, 5.5</b>
6.50-20	C	<b>5.0, 5.00S, 5.5</b>
7.00-16	C	<b>5.50F SDC, 4.50E SDC, 5.00E SDC, 6.00G SDC</b>
7.00-18	C	<b>5.5, 5.0, 5.00S, 6.0, B6.0, 6.00T</b>
7.00-20	C	<b>5.5, 5.0, 5.00S, 6.0, B6.0, 6.00T</b>
7.50-16	C	<b>6.00G SDC, 5.50F SDC, 6.50H SDC</b>
7.50-17	C	<b>6.0, B6.0, 6.00T, 5.0, 5.00S, 5.5, B5.5, 6.5, B6.5</b>
7.50-18	C	<b>6.0, B6.0, 6.00T, 5.0, 5.00S, 5.5, B5.5, 6.5, B6.5</b>
7.50		<b>6.0, B6.0, 6.00T, 5.0, 5.00S, 5.5, B5.5, 6.5, B6.5</b>
8.25-16	C	<b>6.50H SDC, 6.00G SDC</b>
8.25		<b>6.5, B6.5, 5.5, B5.5, 6.0, B6.0, 6.00T, 7.0, B7.0</b>
9.00-16	C	<b>6.50H SDC, 6.00G SDC</b>
9.00		<b>7.0, B7.0, 6.0, 6.00T, 6.5, B6.5, 7.33V, 7.5, B7.5</b>
10.00		<b>7.5, B7.5, 6.5, B6.5, 7.0, B7.0, 7.33V, 8.0, B8.0, 8.0V</b>
11.00		<b>8.0, B8.0, 8.0V, 7.33V, 7.5, B7.5, 8.5, B8.5, 8.50V, 9.00V</b>
12.00		<b>8.5, B8.5, 8.50V, (7.33V), (8.0), (B8.0), (8.0V), 9.0, 9.00V(*)</b>
13.00		<b>9.0, 9.0V, 9.00V, B8.0, 8.5, B8.5, 8.5V, 8.50V, 10.0, 10.00V</b>
14.00		<b>10.0, 10.00V, 10.00W, 9.0</b>
15.00		<b>11.25/2.5, 10.00W</b>

(\*) Rims 7.33V, 8.0, B8.0 and 8.0V do not apply to 20 PR tyres.

# SCANDINAVIAN TIRE & RIM ORGANIZATION



N O R M - N O R M I

L 950.06B

<b>(S)</b> Dimension	<b>Godkända fälgar</b>	<b>Dimension</b>	<b>Godkända fälgar</b>
<b>(FIN)</b> Koko	<b>Hyväksytyt vanteet</b>	<b>Koko</b>	<b>Hyväksytyt vanteet</b>
<b>(GB)</b> Tyre size	<b>Approved Rims</b>	<b>Tyre size</b>	<b>Approved Rims</b>

L 701.01, L 701.02

7-14.5 LT	6.00MH
8-14.5 LT	6.00MH
9-14.5 LT	7.00MH
7-17.5 LT	5.25
8-17.5 LT	5.25
10-17.5 LT	8.25
8.00-16.5 LT	6.00, 6.75
8.75-16.5 LT	6.75, 6.00
9.50-16.5 LT	6.75, 8.25
10-16.5 LT	8.25
12-16.5 LT	9.75, 8.25
7.9-14 LT	7-6J
8.5-14 LT	7-6J, (5 1/2 J)
9-15 LT	8-7J, W8L, 8LB
10-15 LT	7-8 1/2 J
10-16 LT	8J
11-14 LT	8 1/2-8J, 8KB
11-15 LT	8 1/2-8J, W8L, 8KB
11-16 LT	8J
12-15 LT	8 1/2-10J, W10L, 10 LB
E78-14 LT	6-5J
G78-14 LT	6J, 5 1/2 J
C78-14 LT	6-5J
G78-15 LT	7-5 1/2 J, 5 1/2 K, 5.50F
H78-15 LT	7-5 1/2 J, 5 1/2 K, 5.50F
L78-15 LT	7-6J, 6L
F78-16 LT	5.50F, 5K
H78-16 LT	6L, 6.00G, 5.50F
L78-16 LT	7-6L, 6.00G

- (S)** JB-fälg kan ersättas av J  
J-fälg kan ersättas av JJ- eller JK-fälg
- (FIN)** JB-vanne voidaan J  
J-vanne voidaan JJ- tai JK-vanteella
- (GB)** Where JB rim is specified J may  
also be used.  
Where JJ rim is specified J or  
JK rim may also be used.



## INDEX

<b>M - MOTORCYCLE AND SCOOTER TYRES</b>		Page
M 101.01	Small Cubic Capacity Motorcycle, Moped and Scooter Moped Tyres - Code Designated - Diagonal/Radial	328
M 110.01	Scooter Tyres - Code Designated and Millimetric Sizes - Diagonal/Radial	329
M 300.01	Motorcycle Tyres - USA - Millimetric Sizes- Diagonal	330
M 300.02-03	Motorcycle Tyres - USA - 90-80 series - Alpha-numeric - Diagonal	331-332
M 301.01	Motorcycle Tyres - USA - 50-100-series - Millimetric Sizes	333
M 900.00/03	Alternative Rims	334-335

**NOTE!**

For speeds higher than 210 km/h you should use V, W or Z tyres. For V tyres for driving at speeds of between 210 and 220 km/h, the load is 95 % of the value given in the table. At speeds higher than 220 km/h, the load is reduced by 10 % of the table value for each increment of 10 km/h.

The MST designation is used for Special Service Tyres. Contact the tyre manufacturer for confirmation that their D type tyres are permitted to be used for normal highway operations.

For ZR tubeless tyres used on motorcycles with maximum speed over 240 km/h fitment with tube is not recommended.

Motor cycle tyres should not be fitted on rims designed for other types of service (such as on cars, agricultural equipment, etc.) Neither should car tyres be fitted on motor cycle rims. The rims may have different diameters.

The tyre manufacturers do not recommend passenger car tyres on motorcycles. If car tyres are fitted on motor cycle rims, they are often designed for "upright" driving, such as on side-cars.

# SCANDINAVIAN TIRE & RIM ORGANIZATION



## NORM-NORMI

(S) Lätt motorcykel, Moped och Skotermoped  
(FIN) Moped- ja Skootterinmoped  
(GB) Tyres for Mopeds and Small Cubic Capacity Motorcycles

## M 101.01

Diagonal Tumdimensioner  
 Ristikudos Tuumakoot  
 Diagonal Code Designated Sizes

					Max 50 km/h version/ tyyppi/type			Max 100 km/h version/ tyyppi/type			
	mm	mm	kg	kPa	"	"	kg *	"	"	kg **	
<span>(S)</span> Dimension	Bredd	Diam.	Belastn.	Tryck	Fälg	Min.Fälg	Bel. 30 km/h	Fälg	Min.Fälg	Bel. 50 km/h	
<span>(FIN)</span> Koko	Leveys	Halk.	Kantav.	Paine	Vanne	Min.Van.	Kan.30 km/h	Vanne	Min.Van.	Kan. 50 km/h	LI/SI
<span>(GB)</span> Tyre Size	Width	Diam.	Load	Inflation	Rim	Min.Rim	Load30 km/h	Rim	Min.Rim	Load 50 km/h	
2 1/2 - 8 Reinf	70	345	106	280	1.75	1.50	138				
2 1/2 - 9	70	371	80	250	1.75	1.50	104				
2 3/4 - 9	74	381	90	250	1.75	1.50	117				
2 1/4-10	62	380	75	250	1.50	1.35	97				
2 1/2-10	68	396	85	250	1.60	1.50	110				
3 -10	84	418	109	250	2.10	1.85	142				
2 1/4-12	62	431	80	250	1.50	1.35	104				
2 -13	55	442	71	250				1.35	1.20	92	16 J
2 -14	55	468	75	250	1.35	1.20	97				
2 1/4-14	62	482	90	250	1.50	1.20	117	1.50	1.20	117	24 J
2 1/4-14 Reinf	62	482	121	280				1.50	1.20	157	35 J
2 1/2-14	68	498	100	250				1.60	1.35	130	28 J
2 1/2-14 Reinf	68	498	140	280	1.60	1.20		1.60	1.35	169	40 J
2 3/4-14 Reinf	75	508	155	280	1.85	1.35	201	1.85	1.50	201	43 J
2 1/4-15	62	507	90	250	1.50	1.20	117	1.50	1.20	117	24 J
2 1/4-15 Reinf	62	507	125	280	1.50	1.20	162				
2 1/2-15	68	523	106	250				1.60	1.35	138	30 J
2 3/4-15	75	533	120	250				1.85	1.50	156	
2 -16	55	518	80	250	1.35	1.20	104	1.35	1.20	104	20 J
2 -16 Reinf	55	518	109	280	1.35	1.20	142	1.35	1.20	142	31 J
2 1/4-16	62	532	95	250	1.50	1.20	124	1.50	1.20	124	26 J
2 1/4-16 Reinf	62	532	132	280	1.50	1.20	171	1.50	1.20	171	38 J
2 1/2-16	68	548	109	250	1.60	1.20	143	1.60	1.35	143	31 J
2 1/2-16 Reinf	68	548	150	280				1.60	1.35	195	42 J
2 3/4-16	75	558	125	250	1.85	1.35	162	1.85	1.50	162	36 J
2 3/4-16 Reinf	75	558	170	280	1.85	1.35	221	1.85	1.50	221	46 J
3 1/4-16	89	586	160	250	2.15	1.60	208	2.15	1.85	208	44 J
2 -17	55	544	85	250	1.35	1.20	110	1.35	1.20	110	22 J
2 -17 Reinf	55	544	109	280				1.35	1.20	142	31 J
2 1/4-17	62	558	100	250	1.50	1.20	130	1.50	1.20	130	28 J
2 1/4-17 Reinf	62	558	136	280	1.50	1.20	176	1.50	1.20	176	39 J
2 1/2-17	68	574	115	250	1.60	1.20	149	1.60	1.35	149	33 J
2 1/2-17 Reinf	68	574	155	280	1.60	1.20	201	1.60	1.35	201	43 J
2 3/4-17	75	584	132	250				1.85	1.50	171	38 J
2 3/4-17 Reinf	75	584	175	280	1.85	1.35	228	1.85	1.50	228	47 J
3 -17	81	596	145	250				1.85	1.60	189	41 J
3 -17 Reinf	81	596	195	280	1.85	1.50	254	1.85	1.60	254	51 J
2 -18	55	569	85	250	1.35	1.20	110	1.35	1.20	110	22 J
2 1/4-18	62	583	105	250	1.50	1.20	136	1.50	1.20	136	30 J
2 1/2-18	68	599	120	250				1.60	1.35	156	
3 -18	81	621	150	250				1.85	1.60	195	42 J
3 1/4-18	89	637	175	250				2.15	1.85	228	47 J
1 3/4-19	50	589	80	250	1.20	1.20	104				
2 -19	55	595	90	250	1.35	1.20	117	1.35	1.20	117	24 J
2 1/4-19	62	609	105	250	1.50	1.20	136	1.50	1.20	136	30 J
2 1/4-19 Reinf	62	609	145	280	1.50	1.20	189				
2 1/2-19	68	625	120	250	1.60	1.20	156	1.60	1.35	156	35 J
2 1/2-19 Reinf	68	625	165	280	1.60	1.20	215	1.60	1.35	215	45 J
2 1/4-21	62	659	109	250				1.50	1.20	142	31 J
2 1/2-21	68	675	132	250				1.60	1.35	171	38 J
2 -22	55	671	95	250	1.35	1.20	123	1.35	1.20	123	
2 1/4-22 Reinf	62	685	155	280				1.50	1.20	201	



# SCANDINAVIAN TIRE & RIM ORGANIZATION



NORM - NORMI

M 110.01



S Skoterdäck  
FIN Skootterin renkaat  
GB Scooter Tyres

Diagonal  
Ristikudos  
Diagonal

Radial  
Vyörakenne  
Radial

Tum- + mm-dimensioner  
Tuuma- + mm-koot  
Code Designated + mm sizes

	P R	LI/SI							kPa	
				Norm	Max	Norm	Max			
2-50-8			1.75	68		338		100	250	
2.50-9			1.75	68		364		105	250	
2.75-9		35 J	1.75	71	77	374	383	121	250	
2.75-10		37 J	1.85	72	78	399	408	128	250	
3.00-10		42 J	2.15	80	86	413	422	150	250	
	Reinf.	50 J						190	325	
3.00-12		47 J	2.10	80	86	464	473	175	250	
3.50-8		46 J	2.50	92	99	386		170	250	
3.50-10		51 J	2.50	92	99	437	448	195	250	
	Reinf.	59 J						243	325	
3.50-12		56 J	2.50	92	99	488		224	250	
4.00-8		55 J	2.50	105	113	415	427	218	250	
4.00-10		60 J	2.50	105	113	466		250	250	
<b>Transport C</b>										
3.00-10 C	4		2.10	80		420		225	375	
4.00-8 C	4	66 J	3.00	108	117	415	427	300	350	
	6	71 J	3.00	108	117	415	427	345	425	
4.00-10 C	4	69 J	3.00	108	117	466	478	325	350	
	6	74 J	3.00	108	117	466	478	375	425	
4.00-12 C *	6	77 J	3.00	108	117	517	529	412	425	* = RADIAL
4.00-12 C *	8	81 J	3.00					462	500	
4.50-8 C	6		3.50	125	135	439		375	425	
4.50-10 C	4		3.50	125	135	490	504	340	350	
4.50-10 C	6	76 J	3.50	125		490		400	425	
4.50-10 C *	8	80 J						450	500	
5.00-10 C	4		3.50	134	145	516	532	365	275	
	6							437	350	
	8	84 J						500	500	
120/80R12C	8	86 J	2.75	119	129	497	511	530	500	J = Max 100 km/h
130/80R12C	8	90 J	3.00	129	139	513	527	600	500	
140/70R12C	6	86 J	4.00	141	152	501	515	530	425	

# SCANDINAVIAN TIRE & RIM ORGANIZATION



N O R M - N O R M I

M 300.01



S Motorcykeldäck  
FIN Moottoripyörän renkaat  
GB Motorcycle Tyres

Diagonal  
Ristikudos  
Diagonal

mm-dimensioner  
mm-koot  
millimetric sizes

PR-tyre

	P R							kPa
			Norm	Max	Norm	Max		
2.25 - 17	4	1.20	57		556		115	275
2.50 - 16	4	1.60	66		544		125	275
2.50 - 17	4	1.60	66		569		130	275
2.50 - 18	4	1.60	66		594		140	275
2.75 - 17	4	1.60	72		588		160	275
2.75 - 18	4	1.60	72		613		170	275
3.00 - 16	4	1.85	80		577		175	275
- 17	4	1.85	80		602		185	275
- 18	4	1.85	80		627		195	275
- 19	4	1.85	80		653		205	275
- 21	4	1.85	80		704		220	275
3.25 - 16	4	2.15	89		593		180	275
- 17	4	2.15	89		618		195	275
- 18	4	2.15	89		644		205	275
- 19	4	2.15	89		669		215	275
3.50 - 14	4	2.15	93		552		180	275
- 16	4	2.15	93		603		200	275
- 17	4	2.15	93		628		210	275
- 18	4	2.15	93		654		220	275
- 19	4	2.15	93		679		230	275
- 21	4	2.15	93		730		255	275
3.75 - 19T	4	2.50	97		679		230	275
4.00 - 18	4	2.15	104		688		275	275
- 19	4	2.15	104		713		290	275
4.25 - 18 T	4	2.50	108		688		280	275
4.50 - 18	4	2.15	114		714		335	275
5.00 - 16	4	3.00	130		676		345	275
- 17	4	3.00	130		701		365	275
TRA/USA 6-03/78								






# SCANDINAVIAN TIRE & RIM ORGANIZATION



**N O R M - N O R M I**

**M 300.02**

(S) Motorcykeldäck      Profil .90      Diagonal      Alfanum. dim.  
(FIN) Moottoripyörän renkaat      Poikkileikkaussuhde .90      Ristikudos      Alfanumeeriset koot  
(GB) Motorcycle Tyres      Aspect Ratio .90      Diagonal      Alpha-numeric

	P R	L I							kPa	
				Norm	Max	Norm	Max			
ME 90 - 17	B		1.20	57		544		109	275	
MF 90 - 16	B		1.60	66		530		118	275	
MF 90 - 17	B		1.60	66		555		122	275	
MF 90 - 18	B		1.60	66		581		132	275	
MG 90 - 17	B		1.60	72		572		150	275	
MG 90 - 18	B		1.60	72		597		159	275	
MH 90 - 16	B		1.85	80		559		163	275	
MH 90 - 17	B		1.85	80		585		172	275	
MH 90 - 18	B		1.85	80		610		186	275	
MH 90 - 19	B		1.85	80		636		195	275	
MH 90 - 21	B	56	1.85	80	89	686	700	224	275	
MJ 90 - 16	B		2.15	89		574		191	275	
MJ 90 - 17	B		2.15	89		599		200	275	
MJ 90 - 18	B	55	2.15	89	99	625	640	218	275	
MJ 90 - 19	B	56	2.15	89	99	650	665	224	275	
ML 90 - 16	B		2.15	93		583		209	275	
ML 90 - 17	B		2.15	93		609		218	275	
ML 90 - 18	B	57	2.15	93	103	634	650	230	275	
ML 90 - 19	B	59	2.15	93	103	659	675	243	275	
MM 90 - 18	B	60	2.15	95	106	643	660	250	275	
MM 90 - 19	B	61	2.15	95	106	669	685	257	275	
MM 90 - 19 T	B		2.50	95		657		236	275	
MN 90 - 18	B	65	2.15	104	116	662	681	290	275	
MN 90 - 19	B		2.15	104		688		304	275	
MP 90 - 18	B	68	2.15	108	120	673	692	315	275	
MP 90 - 18 T	B		2.50	108		672		313	275	
MR 90 - 18	B	71	2.15	114	127	687	708	345	275	
MS 90 - 17	B	71	2.50	121	134	667	688	345	275	
MT 90 - 16	B	71	3.00	130	144	650	672	345	275	
	C	74						375	275	
	D	76						400	275	
MT 90 - 17	B	73	3.00	130	144	675	697	365	275	
	C	76						400	275	
	D	78						425	275	
MU 90 - 15 M/C	B	74	3.50	142	158	641	665	375	275	
	C	76						400	275	
	D	79						437	275	
MU 90 - 16	B	76	3.50	142	158	667	690	400	275	
	C	78						425	275	
	D	80						450	275	
MV 90 - 15 M/C	B	77	3.50	150	172	651	675	412	275	
	C	79						437	275	
	D	81						462	275	






# SCANDINAVIAN TIRE & RIM ORGANIZATION

N O R M - N O R M I

M 300.03



(S) Motorcykeldäck      Profil .85-.80      Diagonal    Alfanum. dim.  
(FIN) Moottoripyörän renkaat    Poikkileikkaussuhde .85-.80    Ristikudo    Alfanumeeriset koot  
(GB) Motorcycle Tyres      Aspect Ratio .85-.80      Diagonal    Alpha-numeric

	P R	LI							kPa
				Norm	Max	Norm	Max		
ML 85 - 18	B		2.15	93		624		218	275
ML 85 - 19	B		2.15	93		650		231	275
MN 85 - 18	B		2.15	104		651		277	275
MP 85 - 18	B	66	2.15	108	120	660	679	300	275
MR 85 - 16	B	66	2.15	114	127	623	643	300	275
MR 85 - 18	B		2.15	114		674		331	275
MS 85 - 18	B	71	2.50	121	134	682	702	345	275
MT 85 - 18	B	73	3.00	130	144	688	709	365	275
	C	76						400	275
	D	77						412	275
MV 85 -15 M/C	B	75	3.50	150	172	635	658	387	275
	C	77						412	275
	D	79						437	275
MT 80 - 18	B		3.00	130		671		340	275
TRA/USA 6-06/81 6-08-09/95									

# SCANDINAVIAN TIRE & RIM ORGANIZATION

N O R M - N O R M I

M 301.01








(S) Motorcykeldäck  
(FIN) Moottoripyörän renkaat  
(GB) Motorcycle Tyres

50-100-serie  
50-100-sarja  
50-100-series

mm-dimensioner  
mm-koot  
millimetric sizes

USA

	L R	L I							kPa	
				Norm	Max	Norm	Max			
M130/100-16	B		3.00	129	143	666		335	225	
M90/90-19	SL	52	2.15	90	100	645	659	200	225	
M100/90-16	SL	54	2.50	101	113	586	602	212	225	
M100/90-18	SL	56	2.50	101	113	637	653	224	225	
M100/90-19	SL	57	2.50	101	112	663	679	230	225	
M110/90-18	SL	61	2.50	109	121	655	673	257	225	
	EL	67						307	280	
M110/90-19	SL	62	2.50	109	121	681	699	265	225	
M120/90-18	SL	65	2.75	119	132	673	693	290	225	
	EL	71						345	280	
M130/90-16	SL	67	3.00	129	143	640	662	307	225	
	EL	73						365	280	
M130/90-17	SL	68	3.00	129	143	666	688	315	225	
	EL	74						375	280	
M130/90-18	SL	69	3.00	129	143	691	713	325	225	
M140/90-15 M/C	SL	70	3.50	142	158	633	655	335	225	
	EL	76						400	280	
M140/90-16	SL	71	3.50	142	158	658	680	345	225	
	EL	77						412	280	
M150/90-15 M/C	SL	74	3.50	150	167	651	675	375	225	
	EL	79						437	280	
M110/80-17	SL	57	2.50	109	121	608	624	230	225	
M110/80-18	SL	58	2.50	109	121	633	649	236	225	
M120/80-16	SL	60	2.75	119	132	594	616	250	225	
M120/80-17	SL	61	2.75	119	132	624	642	257	225	
M120/80-18	SL	62	2.75	119	132	649	667	265	225	
M130/80-16	SL	64	3.00	129	143	614	632	280	225	
M130/80-17	SL	65	3.00	129	144	640	659	290	225	
M130/80-18	SL	66	3.00	129	143	665	683	300	225	
M140/80-15 M/C	SL	67	3.50	142	157	605	625	307	225	
	EL	73						365	280	
M140/80-17	SL	69	3.50	142	158	656	676	325	225	
M150/80-16	SL	72	3.50	150	166	646	668	355	225	
M150/80-18	SL	74	3.50	150	166	697	719	375	225	
M160/80-15 M/C	SL	74	4.00	162	180	637	660	375	225	
	EL	79						437	280	
M160/80-16	SL	75	4.00	162	180	662	685	387	225	
	EL	81						462	280	
M170/80-15 M/C	SL	77	4.00	170	189	653	677	412	225	
	EL	83						487	280	
M120/70-17	SL	58	3.50	122	134	600	612	236	225	
M120/70-18	SL	59	3.50	122	134	625	637	243	225	
M130/70-17	SL	62	3.50	129	142	614	626	265	225	
M130/70-18	SL	63	3.50	129	142	639	651	272	225	
	EL	69						325	280	
M140/70-17	SL	65	4.00	141	155	628	642	290	225	
M140/70-18	SL	66	4.00	141	155	653	667	300	225	
M150/70-17	SL	69	4.00	149	164	642	656	325	225	
M160/70-17	SL	72	4.50	161	177	656	672	355	225	
M120/60-17	SL	54	3.50	122	134	576	586	212	225	
M160/60-17	SL	69	4.50	161	177	624	638	325	225	
M170/60-17	SL	72	4.50	168	185	636	650	355	225	
M160/60-18	SL	70	4.50	161	177	649	663	335	225	
M170/60-18	SL	73	4.50	168	185	661	675	365	225	
M180/55-17	SL	73	5.50	178	196	630	644	365	225	
M190/50R17	SL	72	6.00	190	209	622	636	355	225	

TRA/USA  
6.04-5/95

# SCANDINAVIAN TIRE & RIM ORGANIZATION



**N O R M - N O R M I**

**M 900.01**

- (S)** Godkända fälgar
- (FIN)** Hyväksytyt vanteet
- (GB)** Approved Rims

<u>M 101.01</u>	<u>Cylindrical bead seat</u>	<u>7° Tapered bead seat</u>
1 3/4	1.20, 1.35	27, 30.5
2	1.35, 1.20	27, 30.5, 34
2 1/4	1.50, 1.20, 1.35, 1.60	27, 30.5, 34, 36
2 1/2	1.60, 1.35, 1.50, 1.85, (1.20)	30.5, 34, 38
2 3/4	1.85, 1.50, 1.60, (1.35)	34, 38
3	1.85, 1.60, 2.15, (1.50)	38
3 1/4	2.15, 1.85, (1.60)	
2 1/2-8	1.75 delad fälg, jaetulla vanteella, divided rim	MT1.50, MT1.85
2 1/2-9	1.75 delad fälg, jaetulla vanteella, divided rim	MT1.50, MT1.85
3-10	2.10 1.75, 2.50, 2.50C delad fälg, jaetulla vanteella, divided rim	MT1.85, MT2.15

Endast cylindrical bead seat och MT fälgar är tillåtna för lätta motorcyklar upp till 100 km/h. Fälgar inom ( ) och 7° tapered endast tillåtna upp till 50 km/h.

Only cylindrical bead seat and MT rims are permitted for small cubic capacity motorcycles upto 100 km/h. Rims shown in brackets and 7° tapered bead seat rims are permitted only for mopeds with maximum speed upto 50 km/h.

Godkända fälgar, Hyväksytyt vanteet, Approved Rims

## M 110.01

2.50	<b>1.75</b>	1.50, 1.75
2.75	<b>1.85</b> , (MT1.50), MT1.85	2.10, 1.75
3.00	<b>2.15</b> , MT1.85, MT2.15, MT2.50, 2.50, 2.50C	2.10, 2.50C, (1.75)
3.50	<b>2.50</b> , MT2.15, 2.15, MT2.50, 2.50C	2.10, 2.15, 2.50C
4.00	<b>2.50</b> , MT2.50, 2.50C, MT3.00, 3.00D	2.50C, 3.00D
100/90	<b>2.50</b> , 2.15, MT2.50, 2.50C, MT2.75, MT3.00	2.50C, 3.00D
160/60	<b>4.50</b>	4.50A, 4.50I, 5.50A, 5.375I

## **CODE DESIGNATED SIZES - >12" DIAGONAL**

2.25	<b>1.50</b> , 1.20, 1.35, 1.60, MT1.50, MT1.60	4.00	<b>2.50</b> , MT2.15, MT2.50, MT2.75, MT3.00, 2.15, 2.75, 3.00
2.50	<b>1.50</b> , 1.35, 1.60, MT1.50, MT1.60	4.10	<b>2.50</b> , MT2.15, MT2.50, MT2.75, 2.15, 2.75, 3.00, MT3.00
2.75	<b>1.85</b> , 1.50, 1.60, MT1.50, MT1.60, MT1.85	4.25	<b>2.50</b> , MT2.15, MT2.50, MT2.75, 2.15, 2.75, 3.00, MT3.00
3.00	<b>1.85</b> , 1.60, 2.15, MT1.60, MT1.85, MT2.15	4.50	<b>2.75</b> , MT2.15, MT2.50, MT2.75, MT3.00, 2.15, 2.50, 3.00
3.25	<b>2.15</b> , MT1.85, MT2.15, 1.85, 2.50, MT2.50	4.60	<b>2.75</b> , MT2.15, MT2.50, MT2.75, MT3.00
3.50	<b>2.15</b> , MT1.85, MT2.15, MT2.50, 1.85, 2.50	5.00	<b>MT3.00</b> , 3.00, MT3.50*
3.60	<b>2.15</b> , MT1.85, MT2.15, MT2.50, 1.85, 2.50	5.10	<b>MT3.00</b> , MT2.50, MT2.75, MT3.50, 2.50, 2.75*
3.75	<b>2.15</b> , MT1.85, MT2.15, MT2.50, 1.85, 2.50		

## Transport "C"

3.00C	x) <b>2.10</b>	2.15, 2.45, 2.50C
4.00C	x) <b>3.00D</b> , MT2.50, 2.50, 2.50C, MT3.00	2.50C, 3.50D
4.50C	x) <b>3.50D</b> , MT3.00, MT3.50, 3.50B, 3.00D	3.00D
5.00C	x) <b>3.50D</b> , MT3.00, MT3.50, 3.50B, 3.00D	3.00D
120/80C	<b>MT2.75</b> , MT2.50, MT3.00, 3.00B, MT3.50, 3.50B	
130/80C	<b>MT3.00</b> , 3.00 B, MT3.50, 3.50B	

- (S)** x) Rekommendation - Fälgdiam 9" och mindre - använd delad fälg, - för 10" - Well base
- (FIN)** x) Suositus - Vanne halk. 9" ja pienemmät - käytä jaettua vannetta, 10" - vanne Well base
- (GB)** x) Recommendation - Rim diameter code 9 and below - use divided rim - for rim diameter code 10 - Well base

# SCANDINAVIAN TIRE & RIM ORGANIZATION



N O R M - N O R M I

M 900.03

Approved rim contours for Motorcycle Tyres TRA

(S) Dimension  
(FIN) Koko  
(GB) Tyre Size

Godkända fälgar  
Hyväksytyt vanteet  
Approved Rims

2.25 ME 2.50 MF 2.75 MG 3.00 MH 3.25 MJ 3.50 ML MM 3.75-19T MM90-19T 4.00 MN MP 4.25-18T MP90-18T 4.50 MR MS 5.00 MT MU MU90-15 M/C MV85-15 M/C MV90-15 M/C	1.20, WM1/1.60 <b>WM1/1.60</b> , 1.20, WM2/1.85, MT1.85 <b>WM1/1.60</b> , WM2/1.85, MT1.85 <b>WM2/1.85</b> , WM1/1.60, MT1.85, WM3/2.15, MT2.15 <b>WM3/2.15</b> , WM2/1.85, MT1.85, MT2.15, MT2.50 <b>WM3/2.15</b> , WM2/1.85, MT1.85, MT2.15, MT2.50 <b>WM3/2.15</b> , WM2/1.85, MT1.85, MT2.15, MT2.50 <b>2.50CM</b> <b>WM3/2.15</b> , MT2.15, MT2.50, MT2.75, MT3.00 <b>WM3/2.15</b> , MT2.15, MT2.50, MT3.00 <b>2.50CM</b> <b>WM3/2.15</b> , MT2.15, MT2.50, MT2.75, MT3.00 <b>MT2.50</b> , MT2.75, MT3.00, MT3.50 <b>MT3.00</b> , MT2.50, MT2.75, 3.00D (16" only), MT3.50, 3.50 D (16") <b>MT3.50</b> , MT2.50, MT2.75, MT3.00 <b>15 M/CxMT3.50</b> , 15 M/CxMT3.00 <b>15 M/CxMT3.50</b> , 15 M/CxMT3.00 <b>15 M/CxMT3.50</b> , 15 M/CxMT3.00
--	--

180 (M/C) 190 (M/C)	<b>55-50 series</b> <b>MT5.50</b> , MT6.00 <b>MT6.00</b> , MT5.50
------------------------	---

110 (M/C) 120 (M/C) 130 (M/C) 140 (M/C) 150 (M/C) 160 (M/C) 170 (M/C)	<b>70-60 series</b> 2.50A, MT2.50, MT2.75, MT3.00, MT3.50 <b>MT3.50</b> , MT3.00, MT3.75 <b>MT3.50</b> , MT3.00, MT3.75, MT4.00 <b>MT4.00</b> , MT3.50, MT3.75, MT4.50 <b>MT4.00</b> , MT3.50, MT3.75, MT4.50 <b>MT4.50</b> , MT3.75, MT4.00, MT5.00 <b>MT4.50</b> , MT4.00, MT5.00, MT5.50
---	--

90 (M/C) 100 (M/C) 110 (M/C) 120 (M/C) 130 (M/C) 140 (M/C) 140/80-15 M/C 140/90-15 M/C 150 (M/C) 150/90-15 M/C 160 (M/C) 160/80-15 M/C 170 (M/C) 170/80-15 M/C	<b>100-80 series</b> <b>WM3/2.15</b> , WM2/1.85, MT1.85, MT2.15, MT2.50 <b>MT2.50</b> , WM3/2.15, MT2.15, MT2.75 <b>MT2.50</b> , WM3/2.15, MT2.15, MT2.75, MT3.00 <b>MT2.75</b> , MT2.50, MT3.00 <b>MT3.00</b> , MT2.50, MT2.75, 3.00D (16"), 3.50D (16"), MT3.50 <b>MT3.50</b> , MT2.75, MT3.00, 3.00D (16"), 3.50D (16"), MT3.75 <b>15M/CxMT3.50</b> , 15M/CxMT2.75, 15M/CxMT3.00, 15M/CxMT3.75 <b>15M/CxMT3.50</b> , 15M/CxMT2.75, 15M/CxMT3.00, 15M/CxMT3.75 <b>MT3.50</b> , MT3.00, MT3.75, MT4.00 <b>15M/CxMT3.50</b> , 15M/CxMT3.00, 15M/CxMT3.75, 15M/CxMT4.00 <b>MT4.00</b> , MT3.50, MT3.75, MT4.50 <b>15M/CxMT4.00</b> , 15M/CxMT3.50, 15M/CxMT3.75, 15M/CxMT4.50 <b>MT4.00</b> , MT3.50, MT3.75, MT4.50 <b>15M/CxMT4.00</b> , 15M/CxMT3.50, 15M/CxMT3.75, 15M/CxMT4.50
---	--

tj-01

MT = TL